



Thermometers & Instrumentation



Garden, Home & Leisure

- Gardenware
- Timers & Counters
- Veterinary & Pet Care
- Personalised Products
- Homeware
- Medical & Healthcare
- Meteorological Instrumentation
- Calibration Services



Measuring Success

Brannan Thermometers & Instrumentation

Measuring Success



S. Brannan & Sons has manufactured and supplied thermometers, gauges and instrumentation since 1913.

Over a century of tradition, combined with modern manufacturing methods at our facilities in the UK ensure unequalled service.

The Company has operated a quality management system since 1991 and currently operates within the scope of ISO 9001: 2015.

Complimenting our production facilities, the Company provides a calibration service operating its own UKAS accredited laboratory where, in addition to having new thermometers tested, customers may also have existing instruments re-calibrated.



0852

Following the 2014 EU ban on mercury, a wide choice of electronic instruments and organic, non-hazardous filling materials, including our Patented LO-**tox**[™] fillings, are available.

This catalogue describes a wide range of products for a variety of applications. Standard items are normally available for immediate delivery. Many can be supplied with customer branding or include modifications to suit special applications.

Products in this catalogue are generally supplied on **Brannan** standard packaging, or customer's own packaging (quantity dependant) and many are also available bulk packed.

Customers' requirements can be discussed with our Sales Team.
Products may also be viewed our website: www.brannan.co.uk

Please note:

- All electronic instruments are supplied with batteries and full instructions.
- All dimensions are for unpacked products
- All information is correct at time of printing but our policy is one of continuous product development. We reserve the right to change specification without notice.



Contents

Contact Details 2



Gardenware Range

Soil Thermometers, Rain Gauges, Pool & Pond Thermometers,
Greenhouse & Conservatory, Weatherstations, Max/Min Thermometers

3 - 12



Homeware Range

Food Preparation Instruments, Freezer & Refrigeration Thermometers,
Wall Thermometers, Clocks, Dial Instruments, Window Thermometers,
Weatherstations, Family Healthcare,

13 - 34



Timers & Counters

Digital Timers, Stopwatches, Tally Counters, Sand Timers

35 - 40



Medical & Healthcare Range

Personal Healthcare, Environment Monitoring, Food Monitoring

41 - 48



Veterinary & Pet Care

Veterinary Thermometers, Terrarium Instruments, Brooder Thermometers,
Pool & Pond Thermometers, General Application Thermometers

49 - 52



Meteorological Range

Rain Gauges, Environmental Meters, Hygrometers, Weatherstations

53 - 58



Calibration Services

UKAS Accredited Laboratory and Certificates of Calibration

59 - 60



Index 61 - 63



Brannan Thermometers & Instrumentation

is located in Cleator Moor on the western fringe of the English Lake District.

Please see below contact details for assistance with your enquiries or to place an order.

All of our prices are competitive and quantity discounts apply.

Alternatively, small orders can be placed on our webshop.

WEBSITE

www.brannan.co.uk

EMAIL

sales@brannan.co.uk

PHONE

+ 44 (0)1946 816600

FAX

+ 44 (0)1946 816625

ADDRESS

S.Brannan & Sons
 Leconfield Industrial Estate
 Cleator Moor
 Cumbria
 UK
 CA25 5QE





Gardenware Range

- Soil Thermometers
- Rain Gauges, Pool & Pond Thermometers
- Greenhouse & Conservatory
- Weatherstations
- Max/Min Thermometers

Brannan

The following products have been developed specifically for measurement of soil and propagator temperature for the amateur gardener and professional horticulturist.



Propagation Thermometer
 150mm green propagation thermometer with white temperature scale.
 Range: 0 to +50°C&F
 Dimensions: 155 x 32 x 10mm
13/418/3



Gardener's Pocket Test Thermometer
 150mm gardener's test thermometer with black temperature scale and clear protective pocket case. Case has pocket clip and hanging hook.
 Range: -30 to +50°C&F
 Dimensions: 167 x 15 diameter
13/403/3

Statement of Conformity Available

Traceable Calibration Available



Glass Stem Thermometers

These instruments are frequently required in the agricultural and horticultural industries to check temperatures of soil, compost or silage. They are available in three lengths and have a 26mm diameter red knob at the top for easy location. Replacement refill thermometers also available (except 13/417/3).



Application	Stem Length	Range	Case Material	Product Number	Refill Product No
Soil	230mm	-10 to +110°C&F	Aluminium	13/417/3	n/a
Hotbed	320mm	-10 to +110°C only	Aluminium	15/354/2	15/754/0
Hotbed	320mm	-10 to +110°C&F	Aluminium	15/354/3	15/954/0
Soil/concrete	490mm	-35 to +50°C only	Brass	15/358/2	15/458/2

Rainfall Measures

Rain Gauge Kit

Heavy duty UV stabilised polypropylene moulded funnel and body.

The measuring jar acts as the collection vessel and is calibrated in millimetres and inches. Rainfall capacity of up to 400ml. The kit is supplied complete with rainfall register book.

Spare 100mm jars and weather registers available.

Range: 0 to 50mm / 0 to 2in

Dimensions: 290 x 120mm diameter

Rain Gauge Kit - 13/070/0

Replacement Jar - 13/061/0

Replacement Register Book - 13/062/0



Rainfall Sprinkler Measure

A simple rain gauge in translucent material calibrated in millimetres and inches. Rainfall capacity of up to 400ml.

Supplied with rainfall chart.

Replacement charts available.

Range: 0 to 50mm / 0 to 2in

Dimensions: 210 x 100mm diameter

Rainfall Measure - 13/414/3

Replacement Charts - 13/063/0

**BEST
SELLER**



Pool and Pond Thermometers

Thermometers to monitor the temperature of pond for carp or other fish, or the temperature of your pool.

1. Scoop Pool & Pond Thermometer

230mm blue scoop pool and pond thermometer with blue temperature scale. Easy to use instrument to check water temperature by sampling.

Range: -10 to +50°C&F

Dimensions: 245 x 46 x 30mm

18/410/3



2. Floating Pool Thermometer

Blue float supports a white thermometer with blue temperature scale.

Range: -10 to +50°C&F

Dimensions: 175 x 60 x 70mm

18/416/3




Pool Thermometer Description	Range	Product Dimensions	Product Number
1. Scoop Thermometer	-10 to +50°C&F	245 x 46 x 30mm	18/410/3
2. Floating Thermometer	-10 to +50°C&F	175 x 60 x 70mm	18/416/3

The following **Brannan** items are suitable for use in the garden and can be placed in a greenhouse, conservatory or sheltered area of your garden. These thermometers can be supplied with certificate traceable to Recognised National Standards or Statement of Conformity, if required.

Traceable
Calibration
Available

Statement of
Conformity
Available



Decorative 380mm Wall Thermometer

Large wall thermometer with decorative orange print and flower design. Suitable for indoor or outdoor use.
Range: -20 to +50°C&F
Dimensions: 380 x 75 x 10mm
14/480/3

380mm Wall Thermometer

Standard plastic wall thermometer suitable for indoor or outdoor use.
Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 380 x 75 x 10mm
14/433/2 (°C only)
14/433/3 (°C&F)



Personalised Products

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork. Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design.
Customer branded packaging can also be arranged to complete the look of your products.
Please contact our Sales Team for details.
(MOQs apply.)



**BEST
SELLER**

145mm Wall Thermometer

Standard plastic wall thermometer suitable for indoor or outdoor use.
Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 145 x 35 x 7mm
14/436/2 (°C only)
14/436/3 (°C&F)



215mm Wall Thermometer

Standard plastic wall thermometer suitable for indoor or outdoor use.
Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 215 x 40 x 8mm
14/435/2 (°C only)
14/435/3 (°C&F)



Decorative 215mm Wall Thermometers

Choice of three attractive wall thermometers with individual designs and co-ordinating scale print. Suitable for use in the home or garden.
Also available as pack of six thermometers (two of each designs).
Range: -10 to +50°C&F
Dimensions: 215 x 40 x 8mm
Wild Fruit Design - 14/460/3
Country Gate Design - 14/461/3
Butterfly Design - 14/462/3
Pack of 6 - 14/463/3





Digital Window Thermometer
 Digital thermometer for measuring outdoor temperature. The suction pad fixes to the outside of your window or any flat surface. Large display for easy reading.
 Range: -20 to +60°C only
 Dimensions: 85 x 43 x 25mm
 LCD Dimensions: 30 x 20mm
14/400/2



Dial Window Thermometer
 Dial thermometer with easy to read blue and red temperature zones. Fixes to outside of window to read outdoor temperature.
 Range: -20 to +50°C&F
 Dimensions: 85 x 65 x 10mm
14/419/3



Mini Dial Thermometer & Hygrometers
 White dial instruments with dark blue scales and red pointers. Thermometer, hygrometer and twin thermometer and hygrometer available. Particularly suited to customer own branding.
 Range: -10 to +50°C only or °C&F / 0 to 100%RH

Mini Dial Description	Range	Product Dimensions	Product Number
1. Thermometer	-10 to +50°C only	65 x 65 x 10mm	30/408/2
	-10 to +50°C&F	65 x 65 x 10mm	30/408/3
2. Hygrometer	0 to 100%RH	65 x 65 x 10mm	30/411/0
3. Twin Thermometer & Hygrometer	°C only and %RH	130 x 65 x 10mm	30/412/2
	°C&F and %RH	130 x 65 x 10mm	30/412/3





Rainbow Patio Thermometer
 Large dial thermometer with easy to read temperature scale and decorative rainbow design.
 Range: -20 to +50°C&F
 Dimensions: 300mm diameter x 40mm
30/120/5



Digital max/min thermometers to measure humidity and indoor and outdoor temperature. These thermometers can be supplied with certificate traceable to National Standards. External probes can be certified to UKAS Standards.

The instruments are supplied complete with battery and full instructions. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.



1. Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures.

Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for outdoor reading.

Temperature Range: -50 to +70°C&F

Dimensions: 98 x 74 x 17mm

LCD Dimensions: 35 x 52mm

12/412/3

Replacement Probe - 12/412/1



2. Jumbo Max/Min Thermometer & Hygrometer

Twin displays to read indoor temperature and humidity or indoor and outdoor temperatures. Complete with stand and 2m cable.

Temperature Range: -50 to +70°C&F

Humidity Range: 20 to 99%RH

Dimensions: 103 x 98 x 21mm

LCD Dimensions: 60 x 80mm

12/421/3

Replacement Probe - 12/421/1

BEST SELLER



3. Weatherstation

Max/min thermometer with silvered front and black trim. Large display with simultaneous reading of temperature and humidity. Complete with stand or hook for wall hanging and 2m cable for outdoor probe.

Temperature Range: -50 to +70°C&F


Humidity Range: 20 to 99%RH

Dimensions: 98 x 74 x 17mm

LCD Dimensions: 35 x 52mm

13/420/3

Replacement Probe - 13/420/4

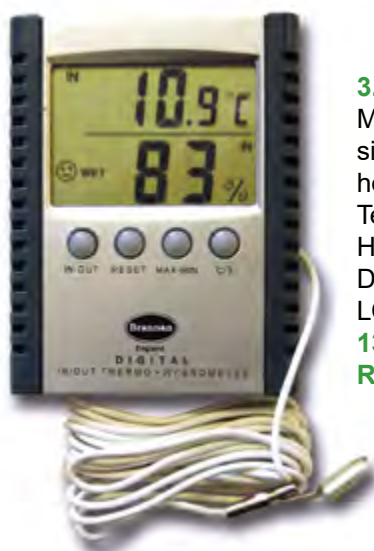

4. Twin Reading Thermometer

Thermometer with max/min feature and high/low alarm settings. Reads outdoor and room temperature simultaneously and is also ideally suited to read room and fridge or freezer temperature. Magnet attachment with 20mm probe and 2m probe cable.

Temperature Range: -50 to +70°C&F

Dimensions: 63 x 63 x 15mm

LCD Dimensions: 21 x 47mm

22/420/3



BEST SELLER



5. Twin Reading Thermometer & Humidity Meter

Instrument to measure indoor and outdoor temperature and humidity. Max/min recording. Main body includes magnet, clip and stand. 2 x 1m cables.


Temperature Range: -50 to +70°C&F

Humidity Range: 10 to 95% RH

Dimensions: 63 x 63 x 22mm

LCD Dimensions: 22 x 40mm

22/425/3



Weatherstation Description	Range		Max/Min Function	Cable Length	LCD Dimensions	Product Dimensions	Product Number
	Internal Reading	Remote Reading					
1. Max/Min Indoor/Outdoor	0 to +50°C&F	-50 to +70°C&F	✓	2.5m	35 x 52mm	98 x 74 x 17mm	12/412/3
1. Replacement Probe	-	-	-	2.5m	-	-	13/412/1
2. Jumbo Max/Min Thermometer & Hygrometer	-10 to +50°C&F & 20 to 99%RH	-50 to +70°C&F	✓	2.0m	60 x 80mm	103 x 98 x 21mm	12/421/3
2. Replacement Probe	-	-	-	2.0m	-	-	12/421/1
3. Weatherstation	-10 to +50°C&F & 20 to 99%RH	-50 to +70°C&F	✓	-	35 x 52mm	98 x 74 x 17mm	13/420/3
3. Replacement Probe	-	-	-	2.0m	-	-	13/420/4
4. Twin Reading Thermometer	-20 to +50°C&F	-50 to +70°C&F	✓	2.0m	22 x 40mm	63 x 63 x 22mm	22/420/3
5. Twin Reading Thermometer & Humidity Meter	-10 to +50°C&F & 10 to 95%RH	-50 to +70°C&F & 10 to 95%RH	✓	1.0m	22 x 40mm	63 x 63 x 22mm	22/425/3

Anti-Bacterial Probe Wipes

200 disinfectant probe wipes in hygienic sealed tub. Kill harmful bacterial without water.

Dimensions: 165 x ø85mm.

13/670/0






The following **Brannan** items are suitable for use in the garden and can be placed in a greenhouse, conservatory or sheltered area of your garden.

Increasing environmental and health concerns have encouraged the development of **Brannan's** own unique **mercury free** maximum minimum thermometers which replace the traditional mercury types, the standard design for over two hundred years. The products use a blue coloured liquid to replace the mercury but retain the ease of operation of the mercury instruments. Our range of max/min thermometers are available in a choice of designs with either a quick-set push button reset or a separate magnet reset. These max/min thermometers can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity, if required.

Statement of Conformity Available

Traceable Calibration Available

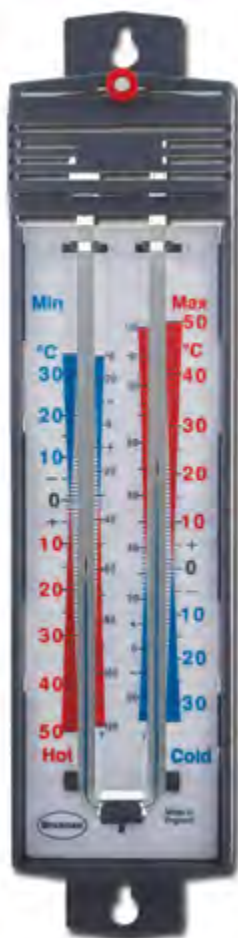

1. Magnet Reset Max/Min Solway Thermometers

A modern design with red, blue and black coloured scale in moulded grey plastic. Separate magnet reset and hanging hook on top and bottom of instrument. Range: -35 to +50°C&F Dimensions: 250 x 60 x 27mm
 12/401/2 (°C only)
 12/401/3 (°C&F)



2. Slimline Magnet Reset Max/Min Thermometers

Slimline max/min design in white plastic with black printed scale. Separate magnet reset and hanging hook on top of instrument. Range: -35 to +50°C&F Dimensions: 205 x 55 x 27mm
 12/407/2 (°C only)
 12/407/3 (°C&F)



3. Heavy Duty Push Button Max/Min Thermometers

A robust design with bulbs fully protected and reset by press button. Black scale with red reset button in a choice of green or grey case. Includes hanging hook at back of instrument. Range: -35 to +50°C&F Dimensions: 200 x 67 x 23mm
 12/404/2 (°C only - Green case)
 12/404/3 (°C&F - Green case)
 12/411/2 (°C only - Grey case)
 12/411/3 (°C&F - Grey case)



**BEST
SELLERS**

4. Quick Set Push Button Max/Min
This popular design features a press button for quick reset. Available in cream plastic with black temperature scale and red reset button or white plastic with blue temperature scale and reset button. Hanging hook on top of instrument.

Range: -35 to +50°C&F

Dimensions: 205 x 55 x 27mm

12/403/2 (°C only - Cream case)


12/403/3 (°C&F - Cream case)

12/408/2 (°C only - White case)

12/408/3 (°C&F - White case)

Traceable
Calibration
Available

Statement of
Conformity
Available

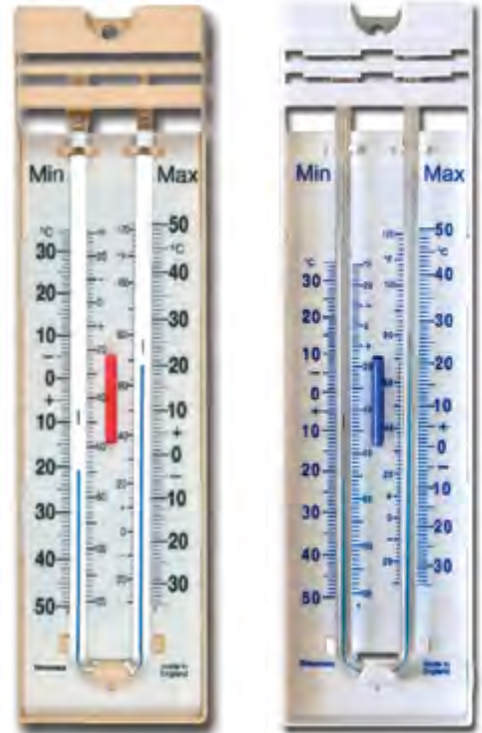

5. Max/Min with Lidded Roof

Traditional design with sloping roof. Green moulded plastic with green temperature scale and reset button. Hanging hook on top of instrument.

Range: -35 to +50°C&F

Dimensions: 226 x 68 x 27mm

12/414/2 (°C only - Green with push button reset)

12/414/3 (°C&F - Green with push button reset)


**Personalised
Products**

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork. Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design.

Customer branded packaging can also be arranged to complete the look of your products.

Please contact our Sales Team for details.

(MOQs apply.)



Max/Min Description	Reset	Product Dimensions	Range	Product Number	
1. Solway Max/Min	Magnet	250 x 60 x 27mm	-35 to +50°C only	12/401/2	
			-35 to +50°C&F	12/401/3	
2. Slimline Max/Min	Magnet	205 x 55 x 27mm	-35 to +50°C only	12/407/2	
			-35 to +50°C&F	12/407/3	
3. Heavy Duty Max/Min	Green Case	Push Button	200 x 67 x 23mm	-35 to +50°C only	12/404/2
				-35 to +50°C&F	12/404/3
	Grey Case	Push Button	200 x 67 x 23mm	-35 to +50°C only	12/411/2
				-35 to +50°C&F	12/411/3
4. Quick Set Max/Min	Cream Case	Push Button	205 x 55 x 27mm	-35 to +50°C only	12/403/2
				-35 to +50°C&F	12/403/3
	White Case	Push Button	205 x 55 x 27mm	-35 to +50°C only	12/408/2
				-35 to +50°C&F	12/408/3
5. Max/Min with Roof	Push Button	226 x 68 x 27mm	-35 to +50°C only	12/414/2	
			-35 to +50°C&F	12/414/3	

The following is our range of electronic max/min instruments suitable for indoor or outdoor* use. All these thermometers have hanging hook for wall mounting. The instruments are supplied complete with battery and full instructions and can be supplied with certificate traceable to Recognised National Standard, if required. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

Traceable Calibration Available

Statement of Conformity Available



BEST SELLER



1. Large Electronic Max/Min Thermometer

Robust digital max/min thermometers suitable for indoor or outdoor* use in white moulding. Triple display shows minimum, maximum and current temperature simultaneously.

Range: -10 to +50°C
Dimensions: 160 x 78 x 31mm
LCD Dimensions: 79 x 60mm

12/426/3

BEST SELLER



2. Large Electronic Max/Min Thermometer

Robust digital max/min thermometers suitable for indoor or outdoor* use in green moulding. Triple display shows minimum, maximum and current temperature simultaneously.

Range: -10 to +50°C
Dimensions: 160 x 78 x 31mm
LCD Dimensions: 79 x 60mm

12/427/3

3. Electronic Max/Min Thermometer with Roof

Attractive max/min thermometer with roof suitable for indoor or outdoor* use. Triple display shows minimum, maximum and current temperature simultaneously.

Range: -10 to +50°C
Dimensions: 150 x 50 x 29mm
LCD Dimensions: 47 x 39mm

12/428/3



4. Classic Design Max/Min Thermometers with Roof

Digital thermometer modelled on traditional liquid-in-glass style max/min design but with digital display. Moulding has protective roof suitable for indoor or outdoor* use. Displays current temperature at same time as maximum and minimum temperature since last reset.

Range: -20 to +50°C
Dimensions: 203 x 100 x 30mm
LCD Dimensions: 16 x 52mm**

12/429/3

**current temperature LCD



Thermometer Description	Range	LCD Dimensions	Product Dimensions	Product Number
1. Large Max/Min Thermometer - White	-10 to +50°C&F	79 x 60mm	160 x 78 x 31mm	12/426/3
2. Large Max/Min Thermometer - Green	-10 to +50°C&F	79 x 60mm	160 x 78 x 31mm	12/427/3
3. Max/Min Thermometer with Roof	-10 to +50°C&F	47 x 39mm	150 x 80 x 29mm	12/428/3
4. Classic Design Max/Min Thermometer	-20 to +50°C&F	16 x 52mm	203 x 100 x 30mm	12/429/3

* These instruments are not waterproof. If using outdoors, position away from rainfall, direct sunlight and draughts.



Homeware Range

- Food Preparation Instruments
- Wall Thermometers
- Dial Instruments
- Weatherstations
- Freezer & Refrigeration Thermometers
- Clocks
- Window Thermometers
- Family Healthcare





Kitchen Range - Food Preparation Instruments

Homeware Range

The following thermometers have been developed to assist with food preparation. These thermometers can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity, if required.

Statement of Conformity Available

Traceable Calibration Available



Milk & Coffee Test Thermometers

These 45mm diameter dial thermometers incorporate green and red zones enabling fast and easy reading of your milk or coffee temperature.

The dials are available in choice of 125mm or 175mm probe and are supplied with a stainless steel clip for attaching to milk jug. Range: -10 to +100°C&F

- Dimensions: 125 x 45mm diameter **31/150/0**
- 175 x 45mm diameter **31/151/0**



Anti-Bacterial Probe Wipes

200 disinfectant probe wipes in hygienic sealed tub. Kill harmful bacterial without water.

Dimensions: 165 x ø85mm. **13/670/0**



Stainless Steel Cooking Thermometer

Stainless Steel thermometer with black temperature scale showing recommended temperatures for cooking.

Range: +20 to +200°C only
Dimensions: 320 x 50 x 12mm **21/474/2**



- 1. Baby Food & Bath Thermometer,
- 2. Cook's Pocket Test Thermometer
- 3. Yoghurt Thermometer

Range of pocket test thermometers supplied in protective cases. Baby Food and Bath Thermometer and Cooks Thermometer have clear black scale. Yoghurt Thermometer has zone for easy reading.

Dimensions: 160 x 20 x 16mm

Thermometer Description	Scale	Product No
1. Baby Food & Bath Pocket Test	0 to +50°C&F	18/348/3
2. Cooks Pocket Test	-5 to +105°C&F	21/475/3
3. Yoghurt Pocket Test	Zones at 43 & 49°C	21/489/2



Timer & Clock

99 minute, 59 second count down and up timer with 12 hour clock, alarm and memory function. Complete with stand, hanger and magnetic fixings.

Dimensions: 66 x 76 x 20mm
LCD Dimensions: 20 x 48mm
28/210/0

BEST SELLER



Kitchen Timer

Easy to read count up and down timer. 99 minute, 59 second count.

Dimensions: 67 x 79 x 17mm
LCD Dimensions: 22 x 40mm
28/217/0

Kitchen Range - Food Preparation Instruments



Homeware Range

Food hygiene is now an important area for public concern and is closely associated with temperature control. **Brannan** thermometers provide a quick and economical way to ensure that the correct temperatures are achieved whilst cooking.

Infrared Thermometer

Simple and compact infrared thermometer with built in laser targetting. The thermometer detects infrared light waves from objects providing easy and safe, non-contact temperature measurement for a wide variety of applications including food storage, preparation and refrigeration.

Supplied complete with Factory Certificate of Calibration.


D:S Ratio: 12:1*

Range: -50 to +500°C&F

Dimensions: 134 x 89 x 36mm

CD Dimensions: 24 x 25mm

38/703/0



Factory Calibration Certificate supplied as standard



* The meters' field of view, or Distance to Spot (D:S) indicates the distance required from the target spot. Therefore, this thermometer should be 12m from the target area. The diameter of the target must be at least 1 cm.

BEST SELLER



Classic Stainless Steel Dial Oven Thermometer

50mm stainless steel dial oven thermometer with black temperature scale. Suitable for hanging or sitting on oven shelf.

Range: +50 to +230°C&F

Dimensions: 75 x 60 x 30mm

23/400/3

Barbecue/Grill Thermometer

Square dial thermometer with coloured temperature scale to assist with the safe preparation of food cooked on a BBQ or grill. Casing has hooks suitable for hanging from rack or grill.

Range: +70 to +350°C&F

Dimensions: 63 x 63 x 21.6mm

23/405/3




Premium Dial Meat Roasting Thermometer

50mm dial meat roasting thermometer with black temperature scale and 105mm probe. Clear text shows recommended temperatures for safe preparation of meat and poultry.

Range: +60 to +90°C only

Dimensions: 110 x 50mm diameter

23/472/2

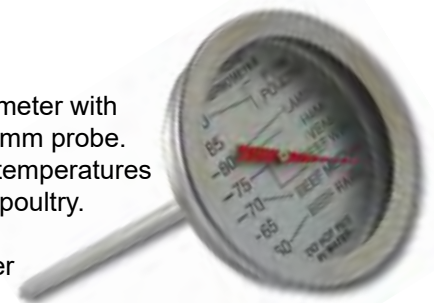

Traceable Calibration Available

Statement of Conformity Available

BEST SELLER

Classic Dial Meat Roasting Thermometer

50mm dial meat roasting thermometer with black animal symbols and clear red zone indicating correct temperatures for safe preparation of meat and poultry. 95mm probe.

Range: 0 to +120°C only

Dimensions: 110 x 50mm diameter


23/401/2



The following digital thermometers are ideally suited to temperature monitoring during food preparation. All our digital instruments are CE, WEEE and RoHS compliant. Probe thermometers can be calibrated to UKAS standard if required.

1. Swivel Head Pocket Test Thermometer

Pocket test thermometer with 145mm probe. Adjustable head through 180° rotation and spiked stainless steel stem. The pocket case and clip can act as a handle for the instrument during use. Hold facility to record temperature. Range: -45 to +200°C
Dimensions: 145 x 34 x 30mm
LCD Dimensions: 10 x 20mm
31/147/0



2. Short Pocket Test Thermometer

Water resistant thermometer with max/min memory and 110mm stainless steel probe. Supplied with protective pocket and clip. Range: -10 to +200°C&F
Dimensions: 175 x 48 x 15mm
LCD Dimensions: 9 x 16mm
31/155/0



BEST SELLER

4. Vertical Barrel Test Thermometer

Test thermometer with vertical display. 120mm stainless steel probe. Supplied with pocket case and clip. Range: -50 to +150°C&F
Dimensions: 195 x 21 x 21mm
LCD Dimensions: 7 x 17mm
31/160/0



3. Catering Test Thermometer

Max/min thermometer with 125mm stainless steel probe. Supplied with protective cover and hanging hook. Range: -10 to +200°C&F
Dimensions: 280 x 40 x 38mm
LCD Dimensions: 12 x 30mm
31/157/0



5. Horizontal Barrel Test Thermometer

Test thermometer with horizontal display. 120mm stainless steel probe.

Supplied with pocket case and clip. Range: -50 to +150°C&F
Dimensions: 152 x 58 x 20mm
LCD Dimensions: 7 x 17mm
31/161/0



6. Water Resistant Test Thermometer

Water resistant thermometer to IP65. With max/min memory and hold functions. 120mm stainless steel probe. Supplied with pocket case and clip. Range: -40 to 200°C&F
Dimensions: 200 x 20 x 15mm
LCD Dimensions: 7 x 17mm
31/162/0



BEST SELLER

7. Waterproof Test Thermometer

Dishwasher safe to 88°C
Waterproof thermometer to IPX7. Suitable for use in dishwasher during cycle. With max/min memory and hold functions and 115mm stainless steel probe. Supplied with pocket case which can be connected to back of thermometer to extend handle. Range: -40 to +250°C&F
Dimensions: 212 x 36 x 16mm
LCD Dimensions: 15 x 25mm
31/164/0



8. Stainless Steel Water Resistant Test Thermometer

Robust Stainless Steel, water resistant thermometer to IP65, with data hold function. 120mm stainless steel probe. Supplied with pocket case and clip. Range: -40 to 200°C&F
Dimensions: 190 x 25 x 12mm
LCD Dimensions: 11 x 30mm
31/165/0



New

New



9. Folding Probe Test Thermometer

Probe thermometer with data hold function and 85mm stainless steel probe which folds in and out of the body of the thermometer for protection. Waterproof to IP65.

Range: -50 to +250°C&F

Dimensions: 45 x 125 x 18mm (closed)

LCD Dimensions: 15 x 32mm

31/175/0



Anti-Bacterial Probe Wipes

200 disinfectant probe wipes in hygienic sealed tub.

Kill harmful bacterial without water.

Dimensions: 165 x ø85mm.

13/670/0

10. Hand Held Waterproof HACCP Thermometer

Hand held thermometer **waterproof to IP68**.

1.35m cable with 150mm stainless steel probe.

High/Low alarm, data hold and max/min recording functions. Complete with hanger, stand and magnetic fixtures.

Supplied complete with calibration certificate.

Range: -40 to +300°C&F

Dimensions: 106 x 54 x 23mm

LCD Dimensions: 20 x 32mm

38/600/0



11. Hand Held Thermometer

Robust 125mm stainless steel probe with 1.5m lead. Temperature hold and max/min recording functions. Complete with hanger, stand and magnetic fixtures.

Replacement probe available.

Range: -50 to +200°C&F

Dimensions: 97 x 65 x 20mm

LCD Dimensions: 16 x 36mm

38/650/0

Replacement Probe - 38/650/1



12. Hand Held Thermometer with Alarm & Timer

Twin display thermometer with 1m cable and 235mm stainless steel probe. Data hold and max/min recording functions.

Complete with hanger, stand and magnetic fixtures.

Replacement probe available.

Range: -50 to +300°C&F

Dimensions: 97 x 65 x 20mm

LCD Dimensions: 16 x 36mm x 2

38/660/0

Replacement Probe - 38/660/1



Thermometer Description	Range	Max/Min Function	Water Resistant	Probe Length	LCD Dimensions	Product Dimensions	Product Number	Replacement Probe
1. Swivel Head Pocket Test	-45 to +200°C&F	X	X	125mm	10 x 20mm	145 x 34 x 30mm	31/147/0	-
2. Short Test	-10 to +200°C&F	✓	IPX4	110mm	9 x 16mm	175 x 48 x 15mm	31/155/0	-
3. Catering Test	-10 to +200°C&F	✓	X	125mm	12 x 30mm	280 x 40 x 38mm	31/157/0	-
4. Vertical Barrel	-50 to +150°C&F	X	X	120mm	7 x 17mm	195 x 21 x 21mm	31/160/0	-
5. Horizontal Barrel	-50 to +150°C&F	X	X	120mm	7 x 17mm	152 x 58 x 20mm	31/161/0	-
6. Water Resistant	-40 to +200°C&F	✓	IP65	120mm	7 x 17mm	200 x 20 x 15mm	31/162/0	-
7. Dishwasher Safe	-40 to +250°C&F	✓	IPX7	115mm	15 x 25mm	212 x 36 x 16mm	31/164/0	-
8. SS Water Resistant	-40 to +200°C&F	X	IP65	120mm	11 x 30mm	190 x 25 x 12mm	31/165/0	-
9. Folding Probe	-50 to +300°C&F	✓	IP65	97mm	8 x 19mm	119 x 30 x 18mm	31/170/0	-
10. HACCP Hand Held	-40 to +300°C&F	✓	IP68	115mm	15 x 25mm	212 x 36 x 16mm	38/600/0	-
11. Hand Held	-50 to +200°C&F	✓	X	1.5m	16 x 36mm	97 x 65 x 20mm	38/650/0	38/650/1
12. Hand Held with Alarm	-50 to +300°C&F	✓	X	1.0m	16 x 36mm	97 x 65 x 20mm	38/660/0	38/660/1

Brannan have a wide range thermometers specifically developed for use in a refrigerator or freezer in both domestic or industrial catering applications. These thermometers will allow you to adjust your appliance for optimum performance to assist with the safe storage of food. All thermometers can be supplied with certificate traceable to Recognised National Standards or Statement of Conformity. External probes can be calibrated to UKAS Standards if required.

BEST SELLER



1. Digital Fridge or Freezer Thermometer
Electronic thermometer which displays fridge or freezer and room temperature. Alarm feature and 1m cable with suction pad.
Range: -50 to +70°C&F
Dimensions: 25 x 135 x 20mm
LCD Dimensions: 12 x 58mm
22/400/3



2. Stainless Steel Fridge or Freezer Dial Thermometer
50mm dial thermometer with black temperature scale and zones indicating recommended temperature settings for your fridge or freezer. Suitable for hanging or sitting on oven shelf.
Range: -40 to +40°C only
Dimensions: 72 x 62 x 40mm
22/402/2



3. Twin Reading Fridge or Freezer and Room Thermometer
Thermometer with max/min feature and high/low alarm settings, to read temperature in a fridge or freezer and room temperature simultaneously. Magnet attachment with 20mm probe and 2m probe cable.
Range: -50 to +70°C&F
Dimensions: 63 x 63 x 15mm
LCD Dimensions: 21 x 47mm
22/420/3



4. Heavy Duty Fridge or Freezer Thermometers
Clear front horizontal thermometer with blue printed scale on white moulding and clear zones indicating recommended temperature for fridge and freezer. Magnet fixture on back of moulding or stainless steel clips for fixture to appliance.
Range: -30 to +30°C&F
Dimensions: Magnet: 30 x 120 x 13mm
Clips: 30 x 120 x 19mm
Magnet Fixture - 22/430/3
Stainless Steel Clips Fixture - 22/450/3



5. Twin Fridge and Freezer Hanging Thermometers
Co-ordinating thermometers, one for use in fridge and second one for use in freezer. Moulded in durable white plastic with easy to read zones and hanging clip. Ideally suited for customers own branding or design.
Zones: -30 to -18°C (freezer)
+0.5 to +5°C (fridge)
Dimensions: 142 x 18 x 6mm x 2pcs
22/440/2

6. Dial Fridge or Freezer Thermometers
Choice of white dial thermometers with zones to indicate recommended temperatures for your appliance. Ideally suited for customers own branding or design.
Range: -30 to +30°C only
Dimensions: 85 x 65 x 12mm
Standard Blue Scale Design - 22/474/2
Penguin Design - 22/475/2



Traceable Calibration Available

Statement of Conformity Available

**BEST
SELLER**



7. Horizontal Fridge or Freezer Thermometers


Choice of horizontal thermometers for use in fridge or freezer. All designs have clear scales printed on white moulding and zones indicating temperatures for safe food storage. Ideally suited for customers own branding or design. Also available as pack of six thermometers (two of each illustrated design).

Range: -30 to +40°C only
 Dimensions: 130 x 40 x 22mm
Standard Design: 22/483/2
Polar Bear Design: 22/486/2
Pack of six: 22/489/2

Penguin Design: 22/485/2
Sundae, fish & Cheese: 22/488/2

**BEST
SELLER**

New

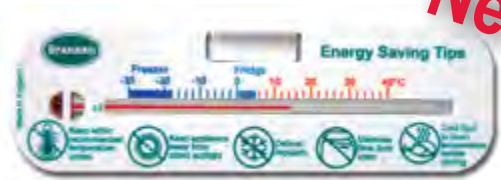

8. Fridge or Freezer Thermometer with Energy Saving Tips

A unique horizontal thermometer for use in fridge or freezer with energy saving tips for your appliance. Ideally suited for customers own branding or design.
 Range: -30 to +40°C only
 Dimensions: 130 x 40 x 22mm
22/494/2

9. Vertical Hanging Fridge or Freezer Thermometer

Vertical thermometer for hanging off fridge or freezer shelf. Moulded in durable white plastic with clear zones indicating temperatures for safe food storage. Ideally suited for customers own branding or design.
 Range: -30 to +40°C only
 Dimensions: 142 x 18 x 6mm
22/491/2



Personalised Products

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork. Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design. Customer branded packaging can also be arranged to complete the look of your products. Please contact our Sales Team for details. (MOQs apply.)



Statement of Conformity Available
Traceable Calibration Available

Description	Range	Dimensions	Product Number
1. Digital Thermometer	-50 to +70°C&F	25 x 135 x 20mm	22/400/3
2. Premium Stainless Steel Dial Thermometer	-40 to +40°C only	72 x 62 x 40mm	22/402/2
3. Twin Reading Digital Thermometer	-50 to +70°C&F	63 x 63 x 15mm	22/420/3
4. Heavy Duty Thermometer	-30 to +30°C&F	Magnet Fixing	30 x 120 x 13mm
		Clip Fixing	30 x 120 x 19mm
5. Twin Hanging Thermometers with zones	Freezer: -30 to -18°C / Fridge: +0.5 to +5°C	142 x 18 x 6mm x 2pcs	22/440/2
6. Dial Thermometer	Standard blue scale design	-30 to +30°C only	86 x 65 x 12mm
	Penguin design	-30 to +28°C only	86 x 65 x 12mm
7. Horizontal Thermometer	Standard blue scale design	-30 to +40°C only	130 x 40 x 22mm
	Penguin design*	-30 to +40°C only	130 x 40 x 22mm
	Polar Bear design*	-30 to +40°C only	130 x 40 x 22mm
	Ice-cream Sundae design*	-30 to +40°C only	130 x 40 x 22mm
	Pack of 6 mixed designs (2pcs each*)	-30 to +40°C only	130 x 40 x 22mm x 6pcs
8. Energy Save Thermometer	-30 to +40°C only	130 x 40 x 22mm	22/494/2
9. Vertical Thermometer	-30 to +40°C only	142 x 18 x 6mm	22/491/2

To minimise the risk of bacteria multiplying on food, it should be stored and prepared at the correct temperature.

To comply with current legislation, the **Brannan** temperature log book has been produced to assist with the requirement for a documented food safety management system.

Each kit comprises of a choice of horizontal, vertical or electronic thermometer and log book supplied in a polypropylene wallet which can be fixed to the corresponding equipment, avoiding confusion in areas where more than one log book is being used.

Each log book will enable you to record daily temperatures over a six month period.

- Each page represents a full week with up to four temperature readings taken and recorded each day.
 - The location, type of equipment being used and the date and/or week number of use can be entered at the top of each page.
 - The monitor can complete the record sheet by noting the time and temperature and add other relevant comments.
- Replacement Log Books can be supplied as required.



1. Temperature Log Book Kit with Horizontal Fridge or Freezer Thermometer

Clear front horizontal thermometer with blue printed scale on white moulding and clear zones indicating recommended temperature for fridge and freezer. Stainless steel clips for fixture to appliance.

Log Book Kit: 22/495/3

(See product 22/450/3 for details of the thermometer included in this kit)

2. Temperature Log Book Kit with Vertical Hanging Fridge or Freezer Thermometer

Vertical thermometer for hanging off fridge or freezer shelf. Moulded in durable white plastic with clear zones indicating temperatures for safe food storage.

Log Book Kit: 22/496/2

(See product 22/491/2 for details of the thermometer included in this kit)

3. Temperature Log Book Kit with Digital Fridge or Freezer and Room Thermometer

Thermometer with max/min feature and high/low alarm settings. Ideally suited to read temperature in a fridge or freezer or outdoor and room temperature simultaneously. Magnet attachment 20mm probe and 2m probe cable.

UKAS Calibration is available on external probe, if required.

Log Book Kit: 22/497/3

(See product 22/420/3 for details of the thermometer included in this kit)



Traceable Calibration Available

Statement of Conformity Available

UKAS Calibration Available

Log Book Kit Description	Thermometer Range	Product Dimensions	Product Number
1. Log Book Kit with Horizontal Thermometer	-30 to +30°C&F	203 x 100 x 30mm	22/495/3
2. Log Book Kit with Vertical Thermometer	-30 to +40°C only	203 x 100 x 30mm	22/496/2
3. Log Book Kit with Digital Thermometer	-50 to +70°C&F	203 x 100 x 35mm	22/497/3
4. Replacement Log Book	n/a	210 x 148 x 3mm	13/090/0



Wooden Cold Room Thermometer

Wooden flat stick refrigerator/cold room thermometer for use in walk-in fridge/freezer or cold storage rooms.
 Range: -30 to +40°C&F
 Dimensions: 275 x 28 x 8mm
22/365/3

Traceable Calibration Available

Statement of Conformity Available

Low Range Room Thermometer



240mm wall thermometer ideal for outdoor uses in cold climate conditions or in cold storage rooms. Moulded in white plastic with clear black print. This thermometer is ideally suited for customers own branding or design.
 Range: -40 to +50°C&F
 Dimensions: 240 x 65 x 8mm
14/810/3

Cold Room Thermometer

240mm wall thermometer for use in walk-in fridge/freezer or cold storage rooms. Moulded in white plastic with clear black print. This thermometer is ideally suited for customers own branding or design.
 Range: -40 to +50°C&F
 Dimensions: 240 x 65 x 8mm
22/375/3



Wine and Beer Thermometers

200mm thermometer for wine and beer making.
 Range: -5 to +105°C&F
 Dimensions: 215 x 20mm diameter
21/594/3

Cellar Thermometer

It is important that your cellar is kept at a constant temperature. This thermometer is suitable for use during storage of beers and wines with clearly marked zone on scale to indicate recommended storage temperatures. This thermometer is ideally suited for customers own branding or design.
 Range: -10 to +50°C&F
 Dimensions: 240 x 65 x 8mm
14/705/3



Wine and Beer Hydrometer

Measuring the specific gravity of wine and beer and designed for home use, this hydrometer will monitor the fermentation process and allows the percentage of alcohol to be determined easily with a zoned scale.
 Range: 0.98 to 1.12°SG
 Dimensions: 230 x 19mm diameter
10/801/0

Wine Design Thermometers

Choice of two 240mm wall thermometers with attractive wine design.
 Range: -10 to +50°C&F
 Dimensions: 240 x 65 x 8mm
White Wine Design: 14/450/3
Red Wine Design: 14/451/3



The following pages illustrate the **Brannan** range of wall thermometers, all having clear markings and are suitable for indoor or outdoor use, in the home or garden. These thermometers are ideally suited for customers own branding or design or design and can be printed in customers own choice of colour (MOQ apply).
Certificate traceable to Recognised National Standard or Statement of Conformity, can be supplied if required.

Traceable Calibration Available

Statement of Conformity Available

BEST SELLER



145mm Plastic Wall Thermometer
Our best selling wall thermometer. 145mm white plastic moulding with black temperature scale. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 145 x 35 x 7mm
14/436/2 (°C only)
14/436/3 (°C&F)



240mm Plastic Wall Thermometer
240mm white plastic wall thermometer moulding with blue temperature scale. Large print area ideally suited for more detailed customer logos or designs.
Range: -20 to +50°C&F
Dimensions: 240 x 65 x 8mm
14/440/2 (°C only)
14/440/3 (°C&F)

BEST SELLER




215mm Plastic Wall Thermometer
Popular 215mm wall thermometer. White plastic moulding with black temperature scale. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 215 x 40 x 8mm
14/435/2 (°C only)
14/435/3 (°C&F)

150mm Plastic Wall Thermometer
Blue printed thermometer on white moulding.
Range: -20 to +50°C&F
Dimensions: 150 x 35 x 7mm
14/438/3 (°C&F)



380mm Plastic Wall Thermometer
380mm white plastic wall thermometer with black temperature scale suitable for use in the garden or home. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 380 x 75 x 10mm
14/433/2 (°C only)
14/433/3 (°C&F)

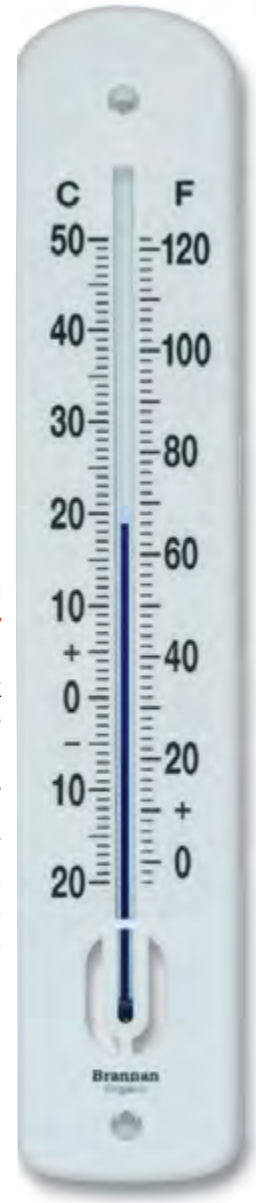

Personalised Products

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork. Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design. Customer branded packaging can also be arranged to complete the look of your products. Please contact our Sales Team for details. (MOQ apply.)

The following items are **Brannan** range of colourful wall thermometers. Other designs and company branding are available through our full design service.

Traceable Calibration Available

Statement of Conformity Available


Decorative 380mm Wall Thermometers

Large wall thermometer with decorative orange print and flower design. Suitable for indoor or outdoor use.
Range: -20 to +50°C&F
Dimensions: 380 x 75 x 10mm
14/480/3




Decorative 215mm Wall Thermometers

Choice of three wall thermometers with individual designs and matching scale print.
Also available as pack of six thermometers (two of each designs).
Range: -20 to +50°C&F
Dimensions: 215 x 40 x 8mm
Wild Fruit Design - 14/460/3
Country Gate Design - 14/461/3
Butterfly Design - 14/462/3
Pack of 6 - 14/463/3

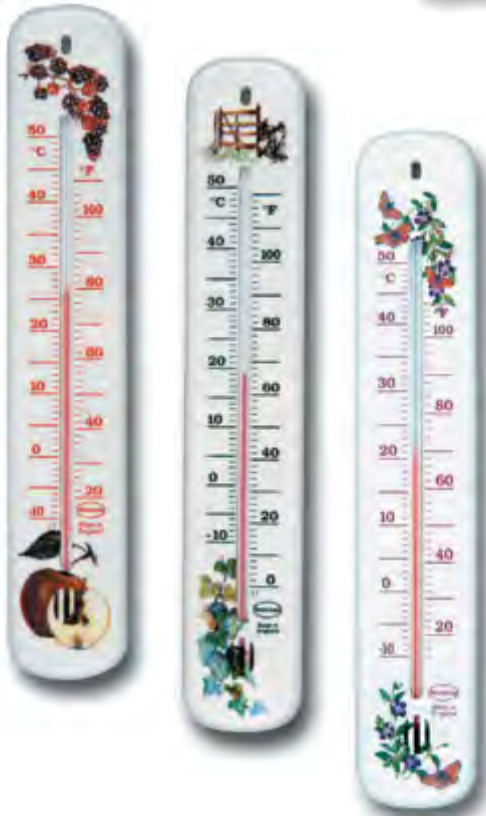

240mm Wall Thermometers With Wine Designs

Choice of white wine or red wine designed wall thermometers with co-ordinating scale print.
Range: -10 to +50°C&F
Dimensions: 240 x 65 x 8mm
White Wine Design - 14/450/3
Red Wine Design - 14/451/3

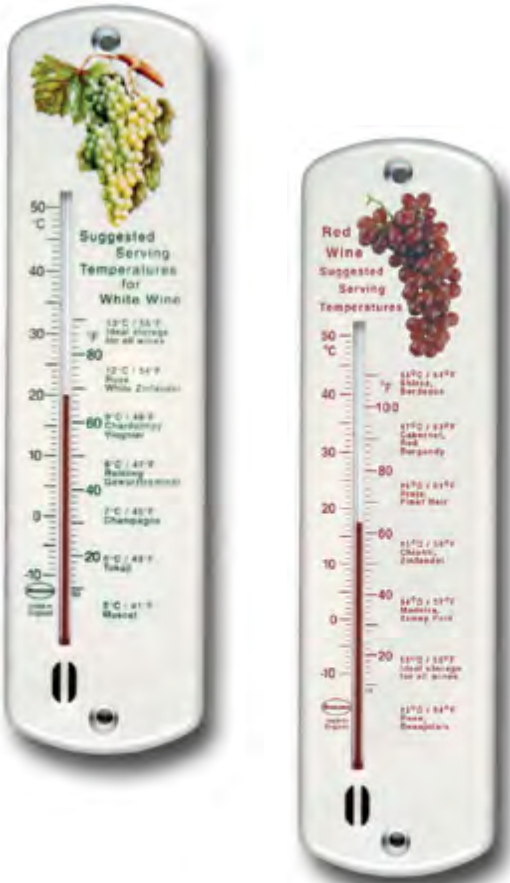

The elderly, babies and young children are particularly susceptible to fluctuations in temperature. It is therefore important to maintain a balanced environment for them. **Brannan** offer a range of room thermometers which all have highly visible, easy to read zones to help determine the most comfortable and economical temperature settings for your home. Certificate traceable to Recognised National Standard or Statement of Conformity, can be supplied if required. These thermometers are ideally suited for customers own branding or design (MOQ apply).

Hypothermia Thermometers

Choice of 155mm, 215mm or 240mm hypothermia wall thermometers with zones to help determine the most comfortable and economical temperature settings for your home.


Range: -20 to +50°C only

155 x 34 x 7mm - **14/862/2**

215 x 40 x 8mm - **14/866/2**

240 x 65 x 8mm - **14/867/2**

See full range of hypothermia thermometers in the Medical and Healthcare section of this catalogue.

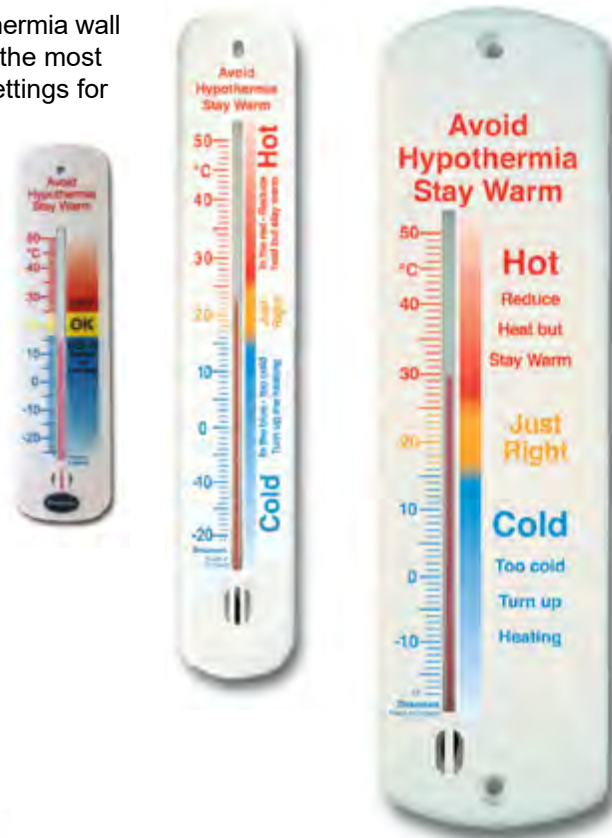

240mm Nursery Wall Thermometers

Babies and young children are particularly susceptible to fluctuations in temperature and it is therefore important to maintain a balanced environment for them.

This choice of three wall thermometers with individual designs help carers check and control bedroom and nursery temperatures. Also available as pack of six (two of each designs).

Range: -10 to +50°C&F / °C only

Dimensions: 240 x 65 x 8mm

Humpty Dumpty - 14/470/3

Teddy Bear - 14/472/2

Giraffe & Bear - 14/474/2

Pack of 6 - 14/473/3

New

Wall Thermometers with Energy Saving Tips


Choice of 145mm, 215mm or 240mm wall thermometer with energy saving tips for your home.

Range: -20 to +50°C only

145 x 34 x 7mm - **14/875/2**

215 x 40 x 8mm - **14/876/2**

240 x 65 x 8mm - **14/877/2**

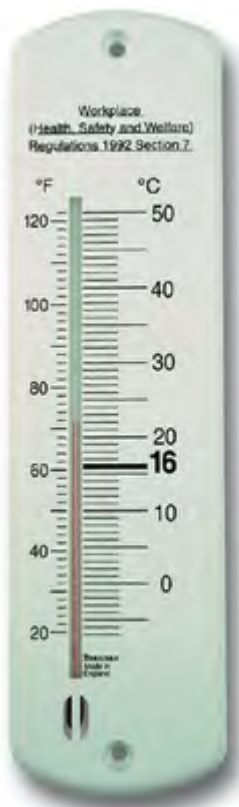

Workplace Thermometers

The following range of wall thermometers all show the recommended temperature for the workplace in accordance with The Workplace (Health, Safety & Welfare) Regulations 1992 Section 7, and are available in a choice of sizes. The clear black scale is printed on a robust plastic moulding. These thermometers can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity, if required.

Range: -20 to +50°C&F

380 x 75 x 10mm - **14/374/3**

240 x 65 x 8mm - **14/390/3**

215 x 40 x 8mm - **14/410/3**

Wooden Wall Thermometers

Choice of wooden wall thermometers; light wood with brass scale plate, standard short thermometer with blue printed scale or long wooden thermometer with black scale.

Certificate traceable to Recognised National Standard or Statement of Conformity, can be supplied with these thermometers if required.

Short Wooden Wall Thermometer

Wooden wall thermometer with blue printed scale. Hanging hole on back of thermometer for hanging off wall.

Range: -20 to +50°C&F

Dimensions: 145 x 35 x 7mm

14/431/2 (°C only)

14/431/3 (°C&F)



Long Wooden Wall Thermometer

Wood wall thermometer with black printed scale.

Hole on back of thermometer for hanging off wall.

Range: -20 to +50°C&F

Dimensions: 205 x 45 x 10mm

14/432/2 (°C only)

14/432/3 (°C&F)



Two Piece Wall Thermometers

Attractive, long or short two piece wall thermometers with contrasting frames.

Certificate traceable to Recognised National Standard or Statement of Conformity, can be supplied with these thermometers if required.

Long, Two Piece Wall Thermometer

Blue print on white temperature scale plate with burgundy frame.

Range: -20 to +50°C&F

Dimensions: 205 x 40 x 12mm

14/441/3 (°C&F)



Short, Two Piece Wall Thermometer

Short wall thermometers with blue print on white scale plate and blue frame.

Range: -10 to +50°C&F

Dimensions: 150 x 44 x 12mm

14/442/3 (°C&F)



Statement of Conformity Available

Traceable Calibration Available

The following is our range of electronic max/min instruments suitable for indoor or outdoor* use. All these thermometers have hanging hook for wall mounting. The instruments are supplied complete with battery and full instructions and can be supplied with certificate traceable to Recognised National Standard, if required. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

Traceable Calibration Available

Statement of Conformity Available

BEST SELLER



1. Large Electronic Max/Min Thermometer
 Robust digital max/min thermometers suitable for indoor or outdoor* use in white moulding. Triple display shows minimum, maximum and current temperature simultaneously.
 Range: -10 to +50°C
 Dimensions: 160 x 78 x 31mm
 LCD Dimensions: 79 x 60mm
12/426/3

BEST SELLER



2. Large Electronic Max/Min Thermometer
 Robust digital max/min thermometers suitable for indoor or outdoor* use in green moulding. Triple display shows minimum, maximum and current temperature simultaneously.
 Range: -10 to +50°C
 Dimensions: 160 x 78 x 31mm
 LCD Dimensions: 79 x 60mm
12/427/3

3. Electronic Max/Min Thermometer with Roof
 Attractive max/min thermometer with roof suitable for indoor or outdoor* use. Triple display shows minimum, maximum and current temperature simultaneously.
 Range: -10 to +50°C
 Dimensions: 150 x 50 x 29mm
 LCD Dimensions: 47 x 39mm
12/428/3



4. Classic Design Max/Min Thermometers with Roof
 Digital thermometer modelled on traditional liquid-in-glass style max/min design but with digital display. Moulding has protective roof suitable for indoor or outdoor* use. Displays current temperature at same time as maximum and minimum temperature since last reset.
 Range: -20 to +50°C
 Dimensions: 203 x 100 x 30mm
 LCD Dimensions: 16 x 52mm**
12/429/3
 **current temperature LCD



Thermometer Description	Range	LCD Dimensions	Product Dimensions	Product Number
1. Large Max/Min Thermometer - White	-10 to +50°C&F	79 x 60mm	160 x 78 x 31mm	12/426/3
2. Large Max/Min Thermometer - Green	-10 to +50°C&F	79 x 60mm	160 x 78 x 31mm	12/427/3
3. Max/Min Thermometer with Roof	-10 to +50°C&F	47 x 39mm	150 x 80 x 29mm	12/428/3
4. Classic Design Max/Min Thermometer	-20 to +50°C&F	16 x 52mm	203 x 100 x 30mm	12/429/3

* These instruments are not waterproof. If using outdoors, position away from rainfall, direct sunlight and draughts.

The **Brannan** range of dial thermometers and hygrometers are suitable for the home, workplace or school. These instruments can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity, if required.

Traceable
Calibration
Available

Statement of
Conformity
Available



Gilt Dial Max/Min Thermometer

Attractive dial max/min thermometer with hygrometer. Black plastic case and red and blue max/min indicators. Range: -20 to +50°C&F / 0 to 100%RH Dimensions: 100mm diameter x 40mm **12/413/3**



Gilt Dial Barometer

Attractive dial barometer with black plastic case and pointer. Range: 940 to 1060 hPa 72 to 80 mm/Hg Dimensions: 80mm diameter x 35mm **28/009/0**



Gilt Dial Thermometer & Hygrometer

100mm gilt dial with temperature and humidity scales printed in black. Range: -20 to +50°C&F / 0 to 100%RH Dimensions: 100mm diameter x 27mm **30/407/3**



Mini Dial Thermometer & Hygrometers

White dial instruments with dark blue scales and red pointers. Thermometer, hygrometer and twin thermometer and hygrometer available. Particularly suited to customer own branding. Range: -10 to +50°C only or °C&F 0 to 100%RH



Mini Dial Description	Range	Product Dimensions	Product Number
1. Thermometer	-10 to +50°C only	65 x 65 x 10mm	30/408/2
	-10 to +50°C&F	65 x 65 x 10mm	30/408/3
2. Hygrometer	0 to 100%RH	65 x 65 x 10mm	30/411/0
3. Twin Thermometer & Hygrometer	°C only and %RH	130 x 65 x 10mm	30/412/2
	°C&F and %RH	130 x 65 x 10mm	30/412/3

Personalised Products

Many of these dials are suitable for customer own branding or design. Personalise packaging can also be arranged. Please contact our Sales Team for details. (MOQ apply.)



Thermometer Fridge Magnets

65mm white dial thermometers with magnet back for attaching to fridge door and hook for hanging off shelf. Choice of two attractive designs.

Particularly suited to customer own branding or illustration.

Range: -10 to +50°C only
Dimensions: 85 x 65 x 12mm

Cricketer Bear Design - 30/420/2
Sundae Design - 30/421/2



Rainbow Patio Thermometer

Large dial thermometer with easy to read temperature scale and decorative rainbow design.

Range: -20 to +50°C&F

Dimensions: 300mm diameter x 40mm

30/120/5



Dial Window Thermometer

Dial thermometer with easy to read blue and red temperature zones. Fixes to outside of window to read outdoor temperature.

Range: -20 to +50°C&F

Dimensions: 85 x 65 x 10mm

14/419/3

Digital Window Thermometer

Digital window thermometer for measuring outdoor temperature.

The suction pad fixes to the outside of your window or any flat surface.

The display has large numbers for easy reading.

Range: -20 to +60°C only

Dimensions: 85 x 43 x 25mm

LCD Dimensions: 30 x 20mm

14/400/2



Digital max/min thermometers to measure humidity and indoor and outdoor temperature. These thermometers can be supplied with certificate traceable to National Standards. External probes can be certified to UKAS Standards. The instruments are supplied complete with battery and full instructions. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures. Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for outdoor reading.
 Temperature Range: -50 to +70°C&F
 Dimensions: 98 x 74 x 17mm
 LCD Dimensions: 35 x 52mm

12/412/3
Replacement Probe - 12/412/1



Jumbo Max/Min Thermometer & Hygrometer

Twin displays to read indoor temperature and humidity or indoor and outdoor temperatures. Complete with stand and 2m cable.

Temperature Range: -50 to +70°C&F
 Humidity Range: 20 to 99%RH
 Dimensions: 103 x 98 x 21mm
 LCD Dimensions: 60 x 80mm

12/421/3 **Replacement Probe - 12/421/1**



BEST SELLER

**UKAS
 Calibration
 Available**

Weatherstation

Max/min thermometer with silvered front and black trim. Large display with simultaneous reading of temperature and humidity. Complete with stand or hook for wall hanging and 2m cable for outdoor probe.

Temperature Range: -50 to +70°C&F
 Humidity Range: 20 to 99%RH
 Dimensions: 98 x 74 x 17mm
 LCD Dimensions: 35 x 52mm

13/420/3
Replacement Probe - 13/420/4



BEST SELLER



Twin Reading Thermometer

Thermometer with max/min feature and high/low alarm settings. Reads outdoor and room temperature simultaneously and is also ideally suited to read room and fridge or freezer temperature. Magnet attachment with 20mm probe and 2m probe cable.

Temperature Range: -50 to +70°C&F
 Dimensions: 63 x 63 x 15mm
 LCD Dimensions: 21 x 47mm

22/420/3



Twin Reading Thermometer & Humidity Meter

Instrument to measure indoor and outdoor temperature and humidity. Max/min recording. Main body includes magnet, clip and stand. 2 x 1m cables.

Temperature Range: -50 to +70°C&F
 Humidity Range: 10 to 95% RH
 Dimensions: 63 x 63 x 22mm
 LCD Dimensions: 22 x 40mm

22/425/3

Anti-Bacterial Probe Wipes

200 disinfectant probe wipes in hygienic sealed tub. Kill harmful bacterial without water.
 Dimensions: 165 x ø85mm.

13/670/0



New Automatic, Non Contact, Rapid Test, Infrared Temperature Scanner

Introducing the automatic temperature scanner specifically designed to assist in current battle against COVID-19 and other infections. The robust thermometer can be wall mounted or positioned on a tripod, situated in a position where a high number of people are entering a premises and capable of taking multiple temperature readings within a short period of time.

Ideally suited for the entrance to schools, office buildings, retail shops, gyms, etc, and eliminates the need for a member of staff to approach visitors.

Please note: This is not a medical device and should not be used for diagnostic purposes. We recommend the use of a medical body thermometer to confirm high temperature readings.

Product Features:

- Automatic temperature measurement - hygienic, non contact
- Quick response reading (0.5s)
- High accuracy – 0.2°C
- Distinctive audible sound and red flashing light alert when high temp detected
- Long measuring distance
- Connects to PC for remote reading and measurement storage
- Wall fixture or optional tripod stand*
- USB cable power supply (suitable for use with rechargeable lithium battery*)

Perfect for schools, colleges, shops, businesses, cafes, cinemas, restaurants, etc




- Temperature Scanner : 14/100/0
- Scanner Tripod : 14/100/1
- 2pcs x Rechargeable Battery: 14/100/2
- *Additional charge applies



Count Up & Count Down Digital Tally Counter

Robust tally counter ideal for counting customers in and out of a venue to assist with social distancing.

Dimensions: 71 x 45 x 15mm
LCD Dimensions: 6 x 19mm
28/504/0

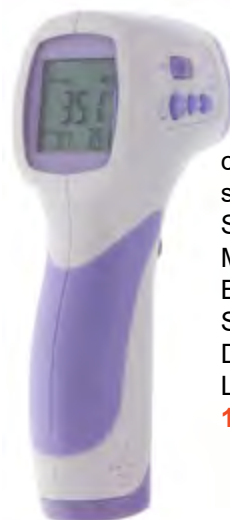

Advanced Body & Surface Temperature Non-Contact, Infrared Thermometer

Ideally suited for use in conjunction with temperature scanner.

See next page for full details.

Memory Recall: 32 measurements
Body Temp Range: +32 to +42.5°C&F
Surface Temp Range: 0 to +60°C&F
Dimensions: 149 x 77 x 43mm
LCD Dimensions: 28 x 24mm

11/400/3

Brannan offer an extensive range of healthcare thermometers for professional or personal use. The complete range can be seen in the Medical & Healthcare Section of this catalogue. The following are our popular, easy to use thermometers suitable for use in the home to give quick and clear readings. All our digital instruments are CE, WEEE and RoHS compliant and are supplied complete with instructions and batteries (where appropriate).

BEST SELLER



1. Standard Oral Clinical Thermometer

Easy to use electronic thermometer suitable for all ages especially babies, young children and the elderly. Rigid probe thermometer suitable for measurements taken orally, rectally, or axillary (under the arm). Supplied in protective case. Suitable for use with disposable probe covers (product number 11/066/0 - see details below). Range: +32 to +42.9°C
Dimensions: 133 x 24 x 14mm
LCD Dimensions: 6 x 18mm
11/064/2

UKAS
Calibration
Available

Traceable
Calibration
Available

Statement of
Conformity
Available



2. Flexi-head Oral Clinical Thermometer with Disposable Probe Covers

Advanced, waterproof, flexible probe clinical thermometer with high speed response reading and protective case. Suitable for measurements taken orally, rectally, or axillary (under the arm). Each thermometer is supplied with 25pcs disposable probe covers for hygienic use of thermometer. Replacement packs available (product number 11/066/0 - see details below). Range: +32 to +42.9°C
Dimensions: 133 x 22 x 12mm
LCD Dimensions: 7 x 20mm
11/065/2



3. Disposable Probe Covers

Pack of 25pcs disposable probe covers for hygienic use of thermometer. Compatible with both models of **Brannan** clinical thermometers.
11/066/0



Description	Range	Product Dimensions	Product Number
1. Standard Clinical Thermometer	+32 to +42.9°C	133 x 24 x 14mm	11/064/2
2. Flexi-Head Clinical Thermometer	+32 to +42.9°C	133 x 22 x 12mm	11/065/2
3. Pack Disposable Probe Covers	n/a	130 x 50 x 30mm	11/066/0



Ovulation Kit

By taking your temperature in a controlled and consistent manner each morning and plotting the results on a chart, it is possible to follow the progress of your menstrual cycle. Oral clinical thermometer supplied with book of recording charts and instructions for daily readings. Dimensions: 210 x 150 x 15mm
11/020/3

NB - This is not a contraceptive device. To interpret the results you must seek the advice of your doctor.



**Market leading
Used by UN organisations**

Advanced Body & Surface Temperature Non-Contact, Infrared Thermometer
 Non-contact and hygienic infrared thermometer designed to take the body temperature of a person regardless of room temperature. Ideally suited for use in schools, businesses or other environments where a large number of people are coming into contact with one another. Features include selectable body or surface temperature and switchable °C/°F readout, alarm value setting, trigger lock and data hold.
 Memory Recall: 32 measurements
 Body Temp Range: +32 to +42.5°C&F
 Surface Temp Range: 0 to +60°C&F
 Dimensions: 149 x 77 x 43mm
 LCD Dimensions: 28 x 24mm
 Pip Code: 347-3733
11/400/3



Statement of Conformity Available

Traceable Calibration Available



Infrared Ear Thermometer
 Easy to use electronic thermometer with digital display and memory of last 10 readings. Complete with protective bag and replacement probe covers for hygienic use of ear thermometer.
 Range: +35.5 to +42°C&F
 Dimensions: 140 x 70 x 90mm
 LCD Dimensions: 10 x 20mm
 Pip Code: 289-2305
11/420/3

BEST SELLER



Infrared Ear Thermometer Replacement Probe Covers (20pcs)
 Boxed Dimensions: 76 x 32 x 30mm
 Pip Code: 329-4303
11/421/0



Forehead Strip Temperature Indicator
 This quick and safe forehead strip thermometer uses heat sensitive liquid encased in plastic film. Ideal for taking the temperature of small children. Comes complete with protective case and full instructions.
 Range: +35 to +40°C&F
 Dimensions: 39 x 99 x 10mm
 PIP Code: 047-6143
11/465/3

Bath Water Thermometers

Brannan offer a range of bath thermometers to assist in obtaining the correct temperature of bath water, therefore avoiding the risk of scalding or chilling. This is invaluable for babies or elderly people.

Statement of Conformity Available

Traceable Calibration Available



Scoop Bath Thermometer

An alternative method of checking bath water temperature by sampling. Dual scale with zones indicating recommended temperatures.

Range: -25 to +50°C&F
Dimensions: 230 x 45 x 35mm

18/126/3



Horizontal Bath Thermometers

140mm white bath thermometer with zones showing recommended temperatures. This thermometer is ideally suited to customer own branding.

Available in standard black, dual scale design or fun and colourful Celsius only design.

Range: -10 to +50°C&F
Dimensions: 140 x 25 x 10mm

Standard Design: 18/132/3 (°C&F)

Coloured Design: 18/140/2 (°C only)



Baby Bath & Food Thermometer

Pocket test thermometers supplied in protective cases for checking temperature of baby's bath or food. thermometer marked with zones to indicate safe temperature of water.

Range: 0 to +50°C&F

Dimensions: 160 x 20 x 16mm

18/348/3



Fish Shaped Bath Thermometer

A quick and fun way to check bath water temperature to avoid the risk of scalding or chilling. Showing recommended bath temperatures.

Range: -6 to +40°C only
Dimensions: 148 x 56 x 14mm

Pip Code: 291-2624

18/420/2



Personalised Products

These thermometers can be personalised to customers' own design, either by adding company logo or complete bespoke artwork.

Customer branded packaging can also be arranged to complete the look of your products.





Timers & Counters

- Digital Timers
- Stopwatches
- Tally Counters
- Sand Timers



Single Count Timers

Wide range of timers which can be used in a variety of applications. The following timers are all single count timers. Double and triple count timers can be seen overleaf. All models are supplied with batteries and operating instructions. All electronic instruments are CE, WEEE and RoHS compliant.



1. Taxi Timer

99 minute, 59 second countdown and up timer modelled around fun taxi design. Desk standing or magnetic fixing.
 Dimensions: 55 x 80 x 22mm
 LCD Dimensions: 20 x 58mm
28/200/0

3pt UKAS
 Calibration
 available on request
 Ref: 49/650/0
 Additional charge
 applies

Traceable
 Calibration
 Available

Statement of
 Conformity
 Available



Visual, audible
 & vibrating
 alarms



2. Multi Alarm Timer & Clock

99 min, 59 sec count down and up timer with 12 hr clock, alarm and memory function. Function includes audible, visual and vibration alarm. Suitable for standing on desk and fitted with pocket clip and magnetic fixings.
 Dimensions: 75 x 53 x 35mm
 LCD Dimensions: 15 x 35mm
28/219/0



3. Large Timer

99 minute, 59 second count-down and up timer. With stand, clip, hanging hook and magnetic fixings.
 Dimensions: 70 x 80 x 20mm
 LCD Dimensions: 38 x 64mm
28/203/0

**BEST
 SELLER**

3pt UKAS
 Calibration
 available on request
 Ref: 49/650/0
 Additional charge
 applies

**BEST
 SELLER**



4. Timer & Clock

99 minute, 59 second countdown and up timer with 12 hour clock, alarm and memory function. Complete with stand, hanger and magnetic fixings.
 Dimensions: 66 x 76 x 20mm
 LCD Dimensions: 20 x 48mm
28/210/0



5. Slimline Timer
 Easy to use 99 minute, 59 second count-down and up timer with magnetic fixing.
 Dimensions: 88 x 48 x 18mm
 LCD Dimensions: 12 x 34mm
28/213/0

Traceable Calibration Available

Statement of Conformity Available



6. Water Resistant Timer
 Large water resistant and steam proof timer to IP64, with stand and suction cup. 99 minute, 59 second countdown timer.
 Dimensions: 91 x 79 x 26mm
 LCD Dimensions: 19.5 x 88mm
28/215/0



7. "Egg" Timer
 Fun, egg design timer. 99 minute, 59 second countdown and up timer.
 Dimensions: 70 x 55 x 55mm
 LCD Dimensions: 13 x 28mm
28/216/0

8. Kitchen Timer
 Easy to read countdown and up timer. 99 minute, 59 second count.
 Dimensions: 67 x 79 x 17mm
 LCD Dimensions: 22 x 40mm
28/217/0



3pt UKAS Calibration available on request
 Ref: 49/650/0
 Additional charge applies

9. Pocket Timer
 Slimline countdown and up timer with large, clear display. 99 minute, 59 second count. This timer is particularly suited to customer branding.
 Dimensions: 67 x 50 x 10mm
 LCD Dimensions: 26 x 35mm
28/218/0



Timer Description	Count	Count Up & Down	Fixings	LCD Dimensions	Product Dimensions	Product Number
1. 'Taxi' Timer	99 min, 59 sec	✓	Desk top	20 x 58mm	55 x 80 x 22mm	28/200/0
2. Multi Alarm Timer	99 min, 59 sec	✓	Stand, clip & magnet	15 x 35mm	75 x 53 x 35mm	28/219/0
3. Large Timer	99 min, 59 sec	✓	Magnet	38 x 64mm	70 x 80 x 20mm	28/203/0
4. Mini Timer	99 Min, 59 Sec	Down only	Magnet & clip	12 x 27mm	55 x 55 x 25mm	28/205/0
5. Slimline Timer	99 min, 59 sec	✓	Magnet	12 x 34mm	88 x 48 x 18mm	28/213/0
6. Water Resistant Timer	99 min, 59 sec	Down only	Suction cup	19.5 x 88mm	91 x 79 x 26mm	28/215/0
7. 'Egg' Timer	99 min, 59 sec	✓	Desk top	13 x 28mm	70 x 55 x 55mm	28/216/0
8. Kitchen Timer	99 min, 59 sec	✓	Magnet & stand	22 x 40mm	67 x 79 x 17mm	28/217/0
9. Pocket Timer	99 min, 59 sec	✓	Magnet	26 x 35mm	67 x 50 x 10mm	28/218/0

Multi Count Timers

Wide range of multi count timers which can be used in a variety of applications. The following timers have double, triple or four-way counters. All models are supplied with batteries and operating instructions. All electronic instruments are CE, WEEE and RoHS compliant.



1. Dual Timer & Clock
 23 hour, 59 minute, 59 second countdown and up dual timer with memory function and 12/24 hour clock.
 With clip and magnetic fixings.
 Dimensions: 53 x 68 x 14mm
 LCD Dimensions: 24 x 35mm
28/206/0



2. Dual Timer & Clock
 Two 24 hour countdown timers. 12/24 hour clock. Magnetic back clip and stand.
 Dimensions: 50 x 60 x 12mm
 LCD Dimensions: 12 x 32mm
28/211/0



BEST SELLER

3. Jumbo Dual Timer & Clock
 Two x 24 hour clock and timer. Countdown and 20 hour count up timer with memory function. Bottom folds out to enable timer to stand unsupported. Also fitted with bracket for wall mounting.
 Dimensions: 140 x 95 x 20mm
 LCD Dimensions: 75 x 63mm
28/208/0



4. Triple Timer & Clock
 Three x 20 hour countdown timers with clock and memory function. Count up timer in 1/100 seconds. 12/24 hour clock.
 Stand and magnetic fixings.
 Dimensions: 86 x 56 x 22mm
 LCD Dimensions: 45 x 40mm
28/207/0

5. Triple Timer & Clock
 Three x 20 hour countdown and up timer and 12/24 hour clock. Stand and magnetic fixing.
 Dimensions: 88 x 66 x 13mm
 LCD Dimensions: 44 x 40mm
28/214/0



BEST SELLER



6. Four Way Timer & Clock
 Four timers in one compact unit. 24 hour countdown and up. 12/24 hour clock. Counter automatically continues to count up when countdown time reached. Magnetic back clip and stand.
 Dimensions: 62 x 75 x 15mm
 LCD Dimensions: 22 x 50mm
28/212/0



Traceable Calibration Available

Statement of Conformity Available

Timer Description	Count	Count Up & Down	Fixings	LCD Dimensions	Product Dimensions	Product Number
1. Dual Timer & Clock	23 hr, 59 min, 59 sec	✓	Magnet & clip	24 x 35mm	53 x 68 x 14mm	28/206/0
2. Dual Timer & Clock	9 hr, 59 min, 59 sec	✓	Magnetic back clip	12 x 32mm	50 x 60 x 12mm	28/211/0
3. Jumbo Dual Timer & Clock	23 hr, 59 min, 59 sec	✓	Wall mountable	75 x 63mm	140 x 95 x 20mm	28/208/0
4. Triple Timer & Clock	23 hr, 59 min, 59 sec	✓	Magnet	45 x 40mm	86 x 56 x 22mm	28/207/0
5. Triple Timer & Clock	23 hr, 59 min, 59 sec	✓	Magnet	44 x 40mm	88 x 66 x 13mm	28/214/0
6. Four Way Timer & Clock	23 hr, 59 min, 59 sec	✓	Magnetic back clip	22 x 50mm	62 x 75 x 15mm	28/212/0

Bench Top Timers

Easy to use bench top timers particularly suited for use in schools. They have colour coded buttons and clear LCD display, housed in a robust ABS casing and are available with and without contacts for external triggering. The timers are highly accurate and have count up with lap and split timing features.

Timing period 9 hr, 59 min, 59 sec.

Dimensions: 90 x 100 x 70.5mm

LCD Dimensions: 20 x 64mm

With External Triggering Contacts 28/410/0
(spare contacts 28/410/4)

Without External Triggering Contacts 28/411/0



Stopwatches

Choice of stopwatches, standard or water resistant. Both models are supplied with batteries and operating instructions. All electronic instruments are CE, WEEE and RoHS compliant and can be supplied with statement of conformity upon request.



1. Stopwatch

1/100 second stopwatch with split counter, calendar, time and alarm. Complete with lanyard.

Max Count: 23hours
59 minutes
59 seconds

Dimensions: 80 x 60 x 17mm
LCD Dimensions: 16 x 33mm

28/404/0



2. Water Resistant Stopwatch

1/100 second waterproof stopwatch to IP65 with large LCD, split counter, calendar, time and alarm. Complete with adjustable hanging cord for use as wrist strap.

Max Count: 23hours
59 minutes
59 seconds

Dimensions: 80 x 65 x 18mm
LCD Dimensions: 17 x 35mm

28/405/0



Description	Max Count	LCD Dimensions	Product Dimensions	Product Number
1. Stopwatch	23 hr, 59 min, 59 sec	16 x 33mm	80 x 60 x 17mm	28/404/0
2. Water Resistant Stopwatch	23 hr, 59 min, 59 sec	17 x 35mm	80 x 65 x 18mm	28/405/0

Tally Counters



New

1. Hand Held Analogue Tally Counter

analogue counters available with with finger holder or metal stand which can be fixed securely to desk or table.. Resets by turning knob.

Dimensions: 48 x 54 x 37mm
Count Dimensions: 6 x 18mm
28/501/0 & 28/502/0

3. Hand Held Digital Tally Counter

Digital tally counter with finger holder. Push button reset.
Dimensions: 50 x 46 x 35mm
LCD Dimensions: 8 x 22mm
28/503/0

4. Count Up & Count Down Digital Tally Counter

Robust tally counter ideal for counting customers in and out of a venue

Dimensions: 71 x 45 x 15mm
LCD Dimensions: 6 x 19mm
28/504/0

Description	Count	Analogue/Digital	Reset	Reading Dimensions	Product Dimensions	Product Number
1. Hand Held Tally Counter	0 to 9999	Analogue	Knob turn	6 x 18mm	48 x 54 x 37mm	28/501/0
2. Desk Top Tally Counter	0 to 9999	Analogue	Knob turn	6 x 18mm	63 x 55.5 x 55.5mm	28/502/0
3. Hand Held Tally Counter	0 to 99999	Digital	Push button	8 x 22mm	50 x 46 x 22mm	28/503/0
3. Count Up & Down Counter	0 to 9999	Digital	Push button	6 x 19mm	71 x 45 x 15mm	28/504/0



Introducing a range of sand timers with robust end caps and wall surrounds. Ideally suited to group or individual use for games, event timing or educational lessons such as mathematics or science. The timers are colour coded for easy identification with a different colour for each timing, for example:
 Green = 1 minute
 Yellow = 3 minutes
 Blue = 5 minutes

Small Sand Timers

Standard sized sand timers available in 1, 3 or 5 minute timings.
 Standard Packs:
 3 x 1 timing (3pcs each of 1, 3 or 5 mins)
 10 x 1 timing (10pcs each of 1, 3 or 5 mins)
 1 x 3 timings (1pc each of 1, 3 and 5 mins)
 Dimensions: 90 x 25mm dia*



Jumbo Sand Timers

Large, fun sized sand timers available in eight different timings/colours. Available in single units.
 Dimensions: 160 x 70mm dia
 Timings: 30 secs, 1 min, 2 mins, 3 mins, 5 mins, 10 mins, 15 mins or 30 mins.

Description	Pack Size	Timing	Product Dimensions*	Product Number
Mixed Pack Small Sand Timers	3 pcs	1pc x 1, 3, & 5 mins	90 x 25mm dia	28/700/0
Small Sand Timers - Green	3 pcs	3pcs x 1 minute	90 x 25mm dia	28/720/0
Small Sand Timers - Yellow	3 pcs	3pcs x 3 minutes	90 x 25mm dia	28/721/0
Small Sand Timers - Blue	3 pcs	3pcs x 5 minutes	90 x 25mm dia	28/722/0
Small Sand Timers - Green	10 pcs	10pcs x 1 minute	90 x 25mm dia	28/701/0
Small Sand Timers - Yellow	10 pcs	10pcs x 3 minutes	90 x 25mm dia	28/702/0
Small Sand Timers - Blue	10 pcs	10pcs x 5 minutes	90 x 25mm dia	28/703/0
Jumbo Sand Timer - Red	1 pc	1pc x 30 seconds	160 x 70mm dia	28/704/0
Jumbo Sand Timer - Green	1 pc	1pc x 1 minute	160 x 70mm dia	28/705/0
Jumbo Sand Timer - Pink	1 pc	1pc x 2 minutes	160 x 70mm dia	28/706/0
Jumbo Sand Timer - Yellow	1 pc	1pc x 3 minutes	160 x 70mm dia	28/707/0
Jumbo Sand Timer - Blue	1 pc	1pc x 5 minutes	160 x 70mm dia	28/708/0
Jumbo Sand Timer - Orange	1 pc	1pc x 10 minutes	160 x 70mm dia	28/709/0
Jumbo Sand Timer - Purple	1 pc	1pc x 15 minutes	160 x 70mm dia	28/710/0
Jumbo Sand Timer - Black	1 pc	1pc x 30 minutes	160 x 70mm dia	28/711/0



* Product dimension is for single unit



Medical & Healthcare Range

- Personal Healthcare
- Environmental Monitoring
- Food Monitoring



Brannan offer an extensive range of healthcare thermometers for professional or personal use. The following products are our easy to use thermometers suitable for use in the home to give quick and clear readings. All our digital instruments are CE, WEEE and RoHS compliant and are supplied complete with instructions and batteries (where appropriate).

BEST SELLER



1. Standard Oral Clinical Thermometer

Easy to use electronic thermometer suitable for all ages especially babies, young children and the elderly. Rigid probe thermometer suitable for measurements taken orally, rectally, or axillary (under the arm). Supplied in protective case.

Suitable for use with disposable probe covers (product number 11/066/0 - see details below).

Range: +32 to +42.9°C
 Dimensions: 133 x 24 x 14mm
 LCD Dimensions: 6 x 18mm
 PIP Code: 261-0954

11/064/2

UKAS Calibration Available

Traceable Calibration Available

Statement of Conformity Available



2. Flexi-head Oral Clinical Thermometer

Advanced, waterproof, flexible probe clinical thermometer with high speed response reading and protective case. Suitable for measurements taken orally, rectally, or axillary (under the arm).

Each thermometer is supplied with 25pcs disposable probe covers for hygienic use of thermometer. Replacement packs available (product number 11/066/0 - see details below).

Range: +32 to +42.9°C
 Dimensions: 133 x 22 x 12mm
 LCD Dimensions: 7 x 20mm
 PIP Code: 368-7472

11/065/2

3. Disposable Probe Covers

Pack of 25pcs disposable probe covers for hygienic use of thermometer. Compatible with both models of **Brannan** clinical thermometers.

PIP Code: 401-9303
11/066/0



Description	Range	Product Dimensions	Product Number
1. Standard Clinical Thermometer	+32 to +42.9°C	133 x 24 x 14mm	11/064/2
2. Flexi-Head Clinical Thermometer	+32 to +42.9°C	133 x 22 x 12mm	11/065/2
3. Pack Disposable Probe Covers	n/a	130 x 50 x 30mm	11/066/0



Ovulation Kit

By taking your temperature in a controlled and consistent manner each morning and plotting the results on a chart, it is possible to follow the progress of your menstrual cycle.

Oral clinical thermometer supplied with book of recording charts and instructions for daily readings.

Dimensions: 210 x 150 x 15mm
 Pip Code: 032-6850

11/020/3

NB - This is not a contraceptive device. To interpret the results you must seek the advice of your doctor.



**Market leading
Used by UN organisations**

**Advanced Body & Surface
Temperature Non-Contact,
Infrared Thermometer**

Non-contact and hygienic infrared thermometer designed to take the body temperature of a person regardless of room temperature. Ideally suited for use in schools, businesses or other environments where a large number of people are coming into contact with one another.

Features include selectable body or surface temperature and switchable °C/°F readout, alarm value setting, trigger lock and data hold.

Memory Recall: 32 measurements
Body Temp Range: +32 to +42.5°C&F
Surface Temp Range: 0 to +60°C&F
Dimensions: 149 x 77 x 43mm
LCD Dimensions: 28 x 24mm
Pip Code: 347-3733

11/400/3



Statement of
Conformity
Available

Traceable
Calibration
Available



**BEST
SELLER**



Infrared Ear Thermometer

Easy to use electronic thermometer with digital display and memory of last 10 readings. Complete with protective bag and replacement probe covers for hygienic use of ear thermometer.

Range: +35.5 to +42°C&F
Dimensions: 140 x 70 x 90mm
LCD Dimensions: 10 x 20mm
Pip Code: 289-2305

11/420/3



**Infrared Ear Thermometer
Replacement Probe Covers (20pcs)**

Boxed Dimensions: 76 x 32 x 30mm
Pip Code: 329-4303

11/421/0

Forehead Strip Temperature Indicator

This quick and safe forehead strip thermometer uses heat sensitive liquid encased in plastic film. Ideal for taking the temperature of small children. Comes complete with protective case and full instructions.

Range: +35 to +40°C&F
Dimensions: 39 x 99 x 10mm
PIP Code: 047-6143

11/465/3

New Automatic, Non Contact, Rapid Test, Infrared Temperature Scanner

Introducing the automatic temperature scanner specifically designed to assist in current battle against COVID-19 and other infections. The robust thermometer can be wall mounted or positioned on a tripod, situated in a position where a high number of people are entering a premises and capable of taking multiple temperature readings within a short period of time.

Ideally suited for the entrance to schools, office buildings, retail shops, gyms, etc, and eliminates the need for a member of staff to approach visitors.

Please note: This is not a medical device and should not be used for diagnostic purposes. We recommend the use of a medical body thermometer to confirm high temperature readings.

Product Features:

- Automatic temperature measurement - hygienic, non contact
- Quick response reading (0.5s)
- High accuracy – 0.2°C
- Distinctive audible sound and red flashing light alert when high temp detected
- Long measuring distance
- Connects to PC for remote reading and measurement storage
- Wall fixture or optional tripod stand*
- USB cable power supply (suitable for use with rechargeable lithium battery*)

Perfect for schools, colleges, shops, businesses, cafes, cinemas, restaurants, etc



Temperature Scanner : 14/100/0

Scanner Tripod : 14/100/1

2pcs x Rechargeable Battery: 14/100/2

*Additional charge applies




Count Up & Count Down Digital Tally Counter

Robust tally counter ideal for counting customers in and out of a venue to assist with social distancing.

Dimensions: 71 x 45 x 15mm

LCD Dimensions: 6 x 19mm

28/504/0

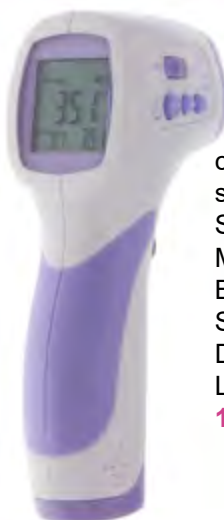

Advanced Body & Surface Temperature Non-Contact, Infrared Thermometer

Ideally suited for use in conjunction with temperature scanner.

See previous page for full details.

Memory Recall: 32 measurements

Body Temp Range: +32 to +42.5°C&F

Surface Temp Range: 0 to +60°C&F

Dimensions: 149 x 77 x 43mm

LCD Dimensions: 28 x 24mm

11/400/3

Babies, young children and the elderly are particularly susceptible to fluctuations in temperature. It is therefore important to maintain a balanced environment for them. These thermometers can be supplied with a Certificate of Conformity or a Calibration Certificate traceable to National Standards.

Room Thermometers



Quick Set Push Button Max/Min
 Please see page 12 & 13 of this catalogue for other max min designs.
 Range: -35 to +50°C&F
 Dimensions: 205 x 55 x 27mm
 Pip Code: 320-1795
12/408/3 °C&F

Traceable Calibration Available

Statement of Conformity Available



Energy Save Wall Thermometer
 Also available in 215mm or 240mm lengths.
 Please see page 27 of this catalogue.
 Range: -20 to +50°C only
 Dimensions: 145 x 34 x 7mm
 PIP Code: 401-9642
14/875/2

Nursery Wall Thermometer
 Other nursery designs available.
 Please see page 26.
 Range: -10 to +50°C only
 Dimensions: 240 x 65 x 8mm
 Pip Code: 320-1837
14/472/2



Max/Min Indoor/Outdoor Thermometer
 White moulded case with two displays for indoor and outdoor temperatures.
 Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for outdoor reading.
 UKAS calibration available on external probe if required.
 Indoor Range: 0 to +50°C&F Outdoor Range: -50 to +70°C&F
 Dimensions: 98 x 74 x 17mm LCD Dimensions: 35 x 52mm
 Pip Code: 320-1803 **12/412/3**




Timer & Clock

99 minute, 59 second countdown and up timer with 12 hour clock, alarm function. Complete with stand, hanger and magnetic fixings.
 Dimensions: 66 x 76 x 20mm
 LCD Dimensions: 20 x 48mm
 Pip Code: 320-1845
28/210/0



Hypothermia Room Thermometers

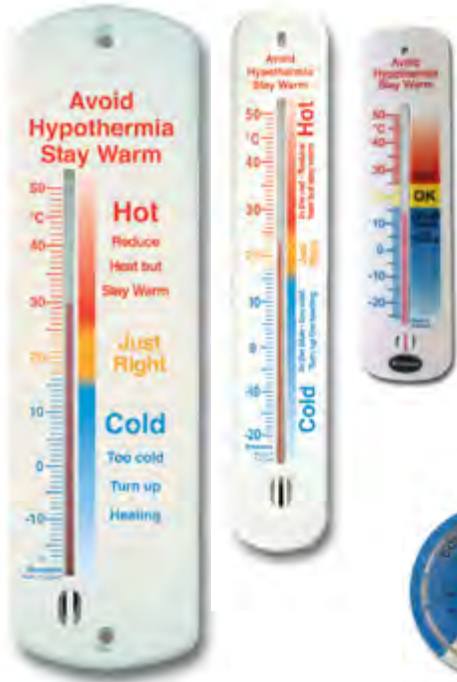

Hypothermia Wall Thermometers
 Choice of 240mm, 215mm or 145mm wall thermometers with zones to help determine the most comfortable and economical temperature settings for your home.
 Range: -20 to +50°C only
 240 x 65 x 8mm - **14/867/2** 215 x 40 x 8mm - **14/866/2**
 145 x 34 x 7mm - **14/862/2**

Statement of Conformity Available

65mm Dial Thermometer on Pyramid card
 Range: +20 to +120°F&C
 Dimensions: 150 x 150 x 80mm
 Pip Code: 320-1829
14/865/3



Hanging Dial Hypothermia Thermometer
 65mm white dial with hook for hanging off shelf.
 Large zones for easy reading.
 Range: -10 to +50°C only Dimensions: 85 x 65 x 12mm
 Pip Code: 401-9311 **14/868/2**

The following instruments assist in the preparation and safe storage of food to minimise the risk of harmful contamination. These thermometers can be supplied with a Certificate of Conformity or a Calibration Certificate traceable to National Standards.



Statement of Conformity Available

Traceable Calibration Available



Digital Fridge or Freezer Thermometer

Electronic thermometer which displays fridge or freezer and room temperature to assist with safe food storage in your appliance. Alarm feature and 1m cable with suction pad. UKAS calibration available on external probe if required.

Range: -50 to +70°C&F
 Dimensions: 25 x 135 x 20mm
 LCD Dimensions: 12 x 58mm
 PIP Code: 401-9592
22/400/3

BEST SELLER



Horizontal Fridge or Freezer Thermometer

130mm white horizontal thermometer with blue temperature scale and zones indicating temperatures for safe food storage. Range: -30 to +40°C only
 Dimensions: 130 x 40 x 22mm
 Pip Code: 033-1462
22/483/2



Dial Fridge or Freezer Thermometer

White dial thermometer with zones to indicate recommended temperatures for your appliance. Range: -30 to +30°C only
 Dimensions: 85 x 65 x 12mm
 Pip Code: 033-1850
22/475/2



UKAS Calibration Available

Waterproof Test Thermometer
 Waterproof thermometer to IP65. With max/min memory, hold functions and 120mm stainless steel probe. Suitable for use with food preparation. Supplied with pocket case and clip.
 Range: -40 to 200°C&F
 Dimensions: 200 x 20 x 15mm
 LCD Dimensions: 7 x 17mm
 Pip Code: 401-9337
31/162/0



BEST SELLER

Vertical Hanging Fridge or Freezer Thermometer

Vertical thermometer for hanging off fridge or freezer shelf. Moulded in durable white plastic with clear zones indicating temperatures for safe food storage. Range: -30 to +40°C only
 Dimensions: 142 x 18 x 6mm
 Pip Code: 261-0913
22/491/2



Personalised Products

Many of our thermometers can be personalised to customers' own design, either by adding company logo or complete bespoke artwork. Please contact our Sales Team for details. (MOQ apply.)



Baby Food & Bath Thermometer

Pocket test thermometers supplied in protective cases for checking temperature of baby's food or bath. thermometer marked with zones to indicate safe temperature of water. Dimensions: 160 x 20 x 16mm
 Pip Code: 032-6942
18/348/3



Temperature Log Book and Thermometer Kit

To minimise the risk of bacteria multiplying on food, it should be stored and prepared at the correct temperature.

To comply with current legislation, the **Brannan** temperature log book has been produced to assist with the requirement for a documented food safety management system.

Each kit comprises of a choice of horizontal, vertical or electronic thermometer and log book supplied in a polypropylene wallet which can be fixed to the corresponding equipment, avoiding confusion in areas where more than one log book is being used.

Each log book will enable you to record daily temperatures over a six month period.

- Each page represents a full week with up to four temperature readings taken and recorded each day.
- The location, type of equipment being used and the date and/or week number of use can be entered at the top of each page.
- The monitor can complete the record sheet by noting the time and temperature and add other relevant comments.

Replacement Log Books can be supplied as required.



Statement of Conformity Available

Traceable Calibration Available

1. Temperature Log Book Kit with Horizontal Fridge or Freezer Thermometer

Clear front horizontal thermometer with blue printed scale on white moulding and clear zones indicating recommended temperature for fridge and freezer. Stainless steel clips for fixture to appliance.

PIP Code: 401-9600

Log Book Kit: 22/495/3

(See product 22/450/3 for details of the thermometer included in this kit)

3. Temperature Log Book Kit with Digital Fridge or Freezer and Room Thermometer

Thermometer with max/min feature and high/low alarm settings. Ideally suited to read temperature in a fridge or freezer or outdoor and room temperature simultaneously. Magnet attachment 20mm probe and 2m probe cable.

UKAS calibration available on external probe if required.

PIP Code: 401-9626

Log Book Kit: 22/497/3

(See product 22/420/3 for details of the thermometer included in this kit)



2. Temperature Log Book Kit with Vertical Hanging Fridge or Freezer Thermometer

Vertical thermometer for hanging off fridge or freezer shelf. Moulded in durable white plastic with clear zones indicating temperatures for safe food storage.

PIP Code: 401-9618


Log Book Kit: 22/496/2

(See product 22/491/2 for details of the thermometer included in this kit)

4. Replacement Log Books

PIP Code: 401-9634

Log Book: 13/090/0

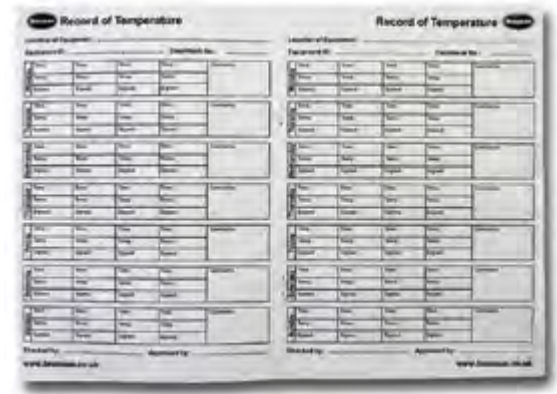

Log Book Kit Description	Thermometer Range	Product Dimensions	PIP Code	Product Number
1. Log Book Kit with Horizontal Thermometer	-30 to +30°C&F	203 x 100 x 30mm	401-9600	22/495/3
2. Log Book Kit with Vertical Thermometer	-30 to +40°C only	203 x 100 x 30mm	401-9642	22/496/2
3. Log Book Kit with Digital Thermometer	-50 to +70°C&F	203 x 100 x 35mm	401-9626	22/497/3
4. Replacement Log Book	n/a	210 x 148 x 3mm	401-9634	13/090/0

Medicine Storage Monitoring

Blood Bank Bottle Thermometer

This unique combination of short scale thermometer fitted in a sealed bottle will smooth out temperature fluctuations caused by the operation of thermostats or opening the storage cabinet.

Range: -5to +20°C only
 Dimensions: 145 x 35mm dia
 Pip Code: 320-1787
22/100/2



Statement of Conformity Available

Traceable Calibration Available

Vaccine Thermometer

Vertical, hanging vaccine thermometer with zones to indicate the safe storage temperature for vaccines and medicines.

Range: -30 to +50°C only
 Dimensions: 144 x 18 x 6mm
 Pip Code: 320-1779
22/992/2



Bath Water Monitoring

Brannan offer a range of bath thermometers to assist in obtaining the correct temperature of bath water, therefore avoiding the risk of scalding or chilling. This is invaluable for babies or elderly people.

Scoop Bath Thermometer

An alternative method of checking bath water temperature by sampling. Dual scale with zones indicating recommended temperatures.

Range: -25 to +50°C&F
 Dimensions: 230 x 45 x 35mm
 Pip Code: 031-3601
18/126/3



Horizontal Bath Thermometers

140mm white bath thermometers with zones showing recommended temperatures. This thermometer is ideally suited to customer own branding. Available in standard black, dual scale design or fun and colourful Celsius only design.

Range: -10 to +50°C&F
 Dimensions: 140 x 25 x 10mm
Standard Design: 18/132/3 (°C&F)
 Pip Code: 031-3619
Coloured Design: 18/140/2 (°C only)



Baby Bath & Food Thermometer

Pocket test thermometers supplied in protective cases for checking temperature of baby's bath or food. Thermometer marked with zones to indicate safe temperature of water.

Range: 0 to +50°C&F
 Dimensions: 160 x 20 x 16mm
 Pip Code: 032-6942
18/348/3

Fish Shaped Bath Thermometer

A quick and fun way to check bath water temperature to avoid the risk of scalding or chilling. Showing recommended bath temperatures.

Range: -6 to +40°C only
 Dimensions: 148 x 56 x 14mm
 Pip Code: 291-2624
18/420/2



Traceable Calibration Available

Statement of Conformity Available



Veterinary & Pet Care

- **Veterinary Thermometers**
- **Terrarium Instruments**
- **Brooder Thermometers**
- **Pool & Pond Thermometers**
- **General Application Instruments**



Electronic Veterinary Thermometers

Easy to use electronic thermometers with chart showing Hobday's specification (the normal body temperature for a variety of animals). Standard, rigid probe thermometer or advanced, waterproof, flexi-head probe thermometer available, both supplied with protective case.



Description	Range	Product Dimensions	Product Number
Standard Digital Vets Thermometer	+32 to +42.9°C	145 x 25 x 15mm	11/015/2
Advanced Digital Vets Thermometer	+32 to +42.9°C	133 x 22 x 12mm	11/035/2

Terrarium Instruments

Range of instruments which can be fixed inside a climate controlled chamber such as a terrarium for environmental monitoring.

Mini Dial Thermometer & Hygrometers

Black dial instruments with yellow scales and red pointers. Thermometer, hygrometer and twin thermometer and hygrometer available with self adhesive pad for fixing inside terrarium. Particularly suited to customer own branding.

Ranges: -10 to +50°C only or °C&F
0 to 100%RH



Mini Dial Description	Range	Product Dimensions	Product Number
Thermometer	-10 to +50°C only	65 x 65 x 10mm	30/440/2
	-10 to +50°C&F	65 x 65 x 10mm	30/440/3
Hygrometer	0 to 100%RH	65 x 65 x 10mm	30/441/0
Twin Thermometer & Hygrometer	°C only and %RH	130 x 65 x 10mm	30/442/2
	°C&F and %RH	130 x 65 x 10mm	30/442/3

Gilt Dial Max Min Thermometer

Attractive dial max/min thermometer with hygrometer. Black plastic case and red and blue max/min indicators.

Range: -20 to +50°C&F / 0 to 100%RH

Dimensions: 100mm diameter x 40mm

12/413/3



Twin Reading Thermometer & Humidity Meter

Instrument to measure indoor and outdoor temperature and humidity. Max/min recording. Main body includes magnet, clip and stand. 2 x 1m cables.

Range: -50 to +70°C&F

10 to 95% RH

Dimensions: 63 x 63 x 22mm

LCD Dimensions: 22 x 40mm

22/425/3



Dial Window Thermometer

Dial thermometer with easy to read blue and red temperature zones. Fixes to outside of window to read temperature.

Range: -20 to +50°C&F

Dimensions: 85 x 65 x 10mm

14/419/3



Digital Window Thermometer

Digital window thermometer for measuring outdoor temperature. The suction pad fixes to the outside of window or any flat surface.

The display has large numbers for easy reading.

Range: -20 to +60°C only

Dimensions: 85 x 43 x 25mm

LCD Dimensions: 30 x 20mm

14/400/2



Brooder Thermometers



Correct temperature control is essential for successful hatching. These thermometers will assist with the adjustment of thermostats and ventilation, helping to achieve optimum conditions during incubation. Choice of plastic or wooden brooder thermometers with easy to read scale and zones marked in weeks to show the various temperature levels required for brooding chicks.



Traceable Calibration Available

Statement of Conformity Available

Plastic Brooder Thermometer

150mm short wall thermometer with week zones to indicate temperature levels required for brooding chicks. This thermometer is ideally suited for customers own branding or design.

Range: -10 to +50°C only
Dimensions: 145 x 34 x 7mm
20/155/2

Pool and Pond Thermometers

The monitoring of environmental conditions is important in keeping specialised or exotic fish. These thermometers will monitor the temperature of pond water for carp or other fish, or the temperature of your pool.



Scoop Pool & Pond Thermometer

230mm blue scoop pool and pond thermometer with white temperature scale. An alternative method of checking water temperature by sampling.

Range: -10 to +50°C&F
Dimensions: 245 x 46 x 30mm
18/410/3

Traceable Calibration Available

Statement of Conformity Available



Floating Pool Thermometer

Blue float supports a white thermometer with blue temperature scale.

Range: -10 to +50°C&F
Dimensions: 175 x 60 x 70mm
18/416/3

Description	Range	Dimensions	Product Number
Scoop Pool & Pond Thermometer	-10 to +50°C&F	245 x 46 x 30mm	18/410/3
Floating Pool Thermometer	-10 to +50°C&F	175 x 60 x 70mm	18/416/3

Indoor/Outdoor Thermometers

Hand held digital test thermometers with probe and lead for remote reading for use where temperatures are extreme or for dual location, for example indoor/outdoor, fridge or freezer, etc. All electronic instruments are CE, RoHS and WEEE compliant, and all instruments can be supplied with calibration certificates if required.

Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures. Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for remote reading.

Temp Range: -50 to +70°C&F
 Dimensions: 98 x 74 x 17mm
 LCD Dimensions: 35 x 52mm
12/412/3



Twin Reading Thermometer

Thermometer with max/min feature and high/low alarm settings. Reads outdoor and room temperature simultaneously and is also ideally suited to read room and fridge or freezer temperature.

Magnet attachment with 20mm probe and 2m probe cable.
 Range: -50 to +70°C&F
 Dimensions: 63 x 63 x 15mm
 LCD Dimensions: 21 x 47mm
22/420/3



Fridge and Freezer Thermometers

Digital Fridge or Freezer Thermometer

Electronic thermometer which displays fridge or freezer and room temperature. Alarm feature and 1m cable with suction pad.

Range: -50 to +70°C&F
 Dimensions: 25 x 135 x 20mm
 LCD Dimensions: 12 x 58mm
22/400/3



**UKAS
 Calibration
 Available**

**Statement of
 Conformity
 Available**

Heavy Duty Fridge or Freezer Thermometer

Heavy duty fridge or freezer thermometer with clear plastic cover which reduces the effect of short-term fluctuations caused by thermostatic variations or through the opening of cabinet doors. Moulded in white plastic with blue scale and clear zones indicating recommended temperature for fridge and freezer. Stainless steel clips for fixture to appliance.

Range: -40 to +30°C
 Dimensions: 30 x 120 x 19mm
22/450/3



**Traceable
 Calibration
 Available**

Batch Sampling Thermometers

These precision test thermometers are sealed into a 30ml polypropylene bottle and are ideally suited to monitor the temperature of samples in controlled storage. The bottle base of the assembly maintains a core temperature similar to that of the samples being monitored and is unaffected by short fluctuations caused by thermostatic variations or through the opening of cabinet doors. Clear reading **LO-tox™** blue filling eliminates the risk of mercury contamination.

Note: Bottle must be filled with a heat transfer medium before use.

These thermometers can be supplied with UKAS Certification on request.

Ranges: See table

Dimensions: 145 x 35mm diameter

Application	Range	Product Number
Freezer	-30 to 0°C	22/101/2
Refrigerator	-5 to +20°C	22/103/2
Incubator	-18 to +50°C	22/105/2





Meteorological Instrumentation

- Rain Gauges
- Hygrometers
- Environmental Meters
- Weatherstations



Traditional rain gauges with printed scale designed to be placed at ground level to measure the amount of rain fall. Both models are supplied with charts to record measurements. Suitable for use in home gardens or for professional use.

Rain Gauge Kit

Heavy duty UV stabilised polypropylene moulded funnel and body. The measuring jar acts as the collection vessel and is calibrated in millimetres and inches. Rainfall capacity of up to 400ml. The kit is supplied complete with rainfall register book.

Spare 100mm jars and replacement weather registers available.

Range: 0 to 50mm / 0 to 2in

Dimensions: 290 x 120mm diameter

Rain Gauge Kit - 13/070/0

Replacement Jar - 13/061/0

Replacement Weather Register Book - 13/062/0



**BEST
SELLER**



Rainfall Sprinkler Measure

A simple rain gauge in translucent material calibrated in millimetres and inches. Rainfall capacity of up to 400ml.


Supplied with rainfall chart. Replacement charts also available.

Range: 0 to 50mm / 0 to 2in

Dimensions: 210 x 100mm diameter

Rainfall Measure - 13/414/3

Replacement Rainfall Chart - 13/063/0

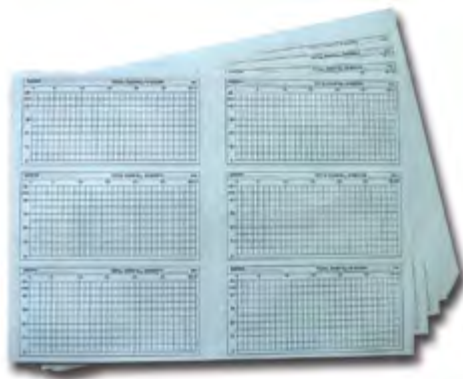

Brannan is pleased to introduce a co-ordinating range of mini, hand held, environmental instruments to measure wind speed, sound levels, light, humidity and temperature. All instruments are supplied complete with Factory Certificate of Calibration (excluding 13/430/0), battery and full instructions. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.



1. Mini Thermo-Anemometer

Wind speed meter to measure air velocity with colour LCD. User selectable units, max/min and data hold functions.

Ranges: 0.4 to 30 m/s
1.4 to 108 km/s
0.9 to 67 Mph
0.8 to 88 knots
80 to 5900 ft/min
-20 to +70°C&F



Accuracy: +/-3% rdg & +/-1.5°C
Dimensions: 178.5 x 56 x 30.5mm
LCD Dimensions: 30 x 28mm

13/470/0

3 point Traceable Calibration available on request: **49/705/0**
(Additional charge applies)



2. Mini Thermo-Sound Level Meter

Mini meter to measure sound level with colour LCD. Max/min and data hold functions.

Ranges: 35 to 135dB
-20 to +70°C&F

Accuracy: 2.0dB
Dimensions: 144 x 56 x 30.5mm
LCD Dimensions: 30 x 28mm

13/471/0

3 point Traceable Calibration available on request: **49/706/0**
(Additional charge applies)



Factory Calibration Certificate supplied as standard*



3. Mini Thermo-Light Meter

Hand held meter to measure illuminance. Silicone photo-diode with spectral response filter. Features include max/min recording, colour LCD and user selectable units.

Ranges: 0 to 200kLux,
0 to 20kFc
-20 to +70°C&F

Accuracy*: +/- 3% rdg
Dimensions: 174.5 x 56 x 30.5mm
LCD Dimensions: 30 x 28mm

13/472/0

3 point Traceable Calibration available on request: **49/707/0**
(Additional charge applies)



4. Mini Thermo-Humidity Meter

A digital instrument which has been designed to combine the functions of a thermometer and humidity meter.

Features user selectable units, max/min recording and data hold function and colour LCD.

Ranges: 0 to 100%RH
-20 to +70°C&F

Accuracy*: +/- 1°C / 3.5%RH
Dimensions: 168 x 56 x 30.5mm
LCD Dimensions: 30 x 28mm

13/473/0

3 point Traceable Calibration available on request: **49/708/0**
(Additional charge applies)



Description	Range	LCD Dimensions	Product Dimensions	Product Number
1. Mini Anemometer	0.4 to 30 m/s, 1.4 to 108 km/s 0.8 to 88 knots, 0.9 to 67 Mph	30 x 28mm	179 x 56 x 31mm	13/470/0
2. Mini Sound Level Meter	35 to 135dB	30 x 28mm	144 x 56 x 31mm	13/471/0
3. Mini Light Meter	0 to 200 klux, 0 & 20 kFc	30 x 28mm	175 x 56 x 31mm	13/472/0
4. Mini Humidity Temperature Meter	Humidity: Temp:	0 to 100%RH -30 to 70°C&F	168 x 56 x 31mm	13/473/0



These humidity meters measure the amount of water vapour in the atmosphere, on a percentage scale known as Relative Humidity (%RH). All instruments can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity if required.



Mini Thermo-Humidity Meter

A digital instrument which has been designed to combine the functions of a thermometer and humidity meter.

Features user selectable units, max/min recording and data hold function and colour LCD.

Ranges: 0 to 100%RH
-20 to +70°C&F

Accuracy*: +/- 1°C / 3.5%RH
Dimensions: 168 x 56 x 30.5mm
LCD Dimensions: 30 x 28mm

13/473/0

3 point Traceable Calibration available on request: **49/708/0**
(Additional charge applies)



Twin Reading Humidity Meter and Thermometer

Instrument to measure indoor and outdoor temperature and humidity. Max/min recording. Main body includes magnet, clip and stand. 2 x 1m cables.

UKAS calibration certificate can be supplied for external probes on request.
Range: 10 to 95% RH
-50 to +70°C&F
Dimensions: 63 x 63 x 22mm
22/425/3




UKAS
Calibration
Available



Mini Dial Hygrometer and Twin Hygrometer/Thermometer

White moulded hygrometer and twin hygrometer/thermometer dial instruments with dark blue scales and red pointers. Temperature scale available in single or dual scale.

Mini Dial Description	Range	Product Dimensions	Product Number
Hygrometer	0 to 100%RH	65 x 65 x 10mm	30/411/0
Twin Thermometer & Hygrometer	°C only and %RH	130 x 65 x 10mm	30/412/2
	°C&F and %RH	130 x 65 x 10mm	30/412/3

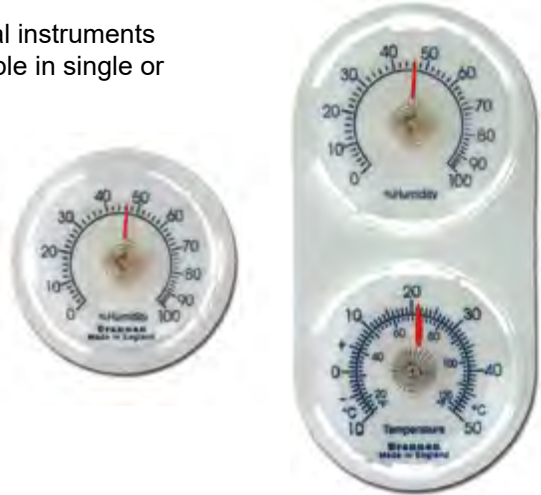

Gilt Dial Thermometer and Hygrometer

100mm diameter dial with temperature and humidity scales printed in black.
Range: -20 to +50°C&F / 0 to 100%RH
Dimensions: 100mm dia x 27mm
30/407/3



Gilt Dial Barometer

Attractive dial barometer with black plastic case and pointer.
Range: 940 to 1060 hPa
72 to 80 mm/Hg
Dimensions: 80mm diam x 35mm
28/009/0



Gilt Dial Max/Min Thermometer and Hygrometer


Attractive dial max/min thermometer with hygrometer. Gilt face with black plastic case and red and blue max/min indicators.
Range: -20 to +50°C&F / 0 to 100%RH
Dimensions: 100mm dia x 40mm
12/413/3



Whirling Hygrometers

The difference between the "wet and "dry" bulb temperatures enables the %RH to be determined through the use of tables or a calculator which are supplied with our hygrometers.

Whirling hygrometers, also known as sling psychrometers, employ the "wet" and "dry" bulb principal to determine %RH. They are designed to be rotated, by hand, to provide adequate and consistent ventilation of the bulbs. These hygrometers can be supplied with UKAS calibration certificates or Statement of Conformity if required.

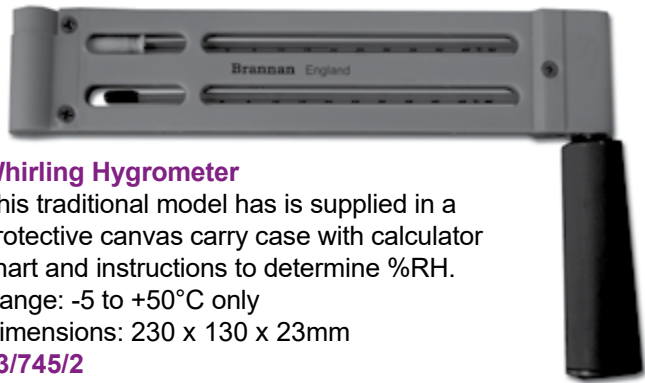

**UKAS
Calibration
Available**


Whirling Hygrometer

This traditional model has is supplied in a protective canvas carry case with calculator chart and instructions to determine %RH.
Range: -5 to +50°C only
Dimensions: 230 x 130 x 23mm

13/745/2

Pair replacement tubes: 13/645/2

Pack of 12 Replacement Wicks: 13/086/0

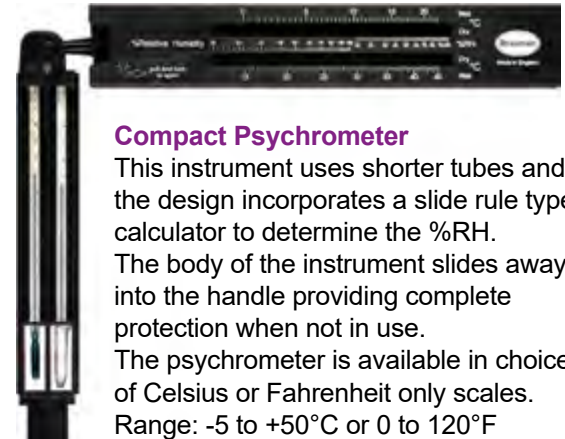

Compact Psychrometer

This instrument uses shorter tubes and the design incorporates a slide rule type calculator to determine the %RH. The body of the instrument slides away into the handle providing complete protection when not in use. The psychrometer is available in choice of Celsius or Fahrenheit only scales.
Range: -5 to +50°C or 0 to 120°F
Dimensions: 210 x 36 x 16mm

13/606/2 - °C only

Replacement Tube - 13/605/2 (°C only)

13/606/1 - °F only

Replacement Tube - 13/605/1 (°F only)



Masons Hygrometers

Masons Hygrometer

White polypropylene case with water container and wick. Supplied complete with calculator chart and instructions to determine %RH.
Replacement water container pots and wick also available.
Range: -5 to +50°C&F
Dimensions: 310 x 77 x 32mm

13/222/3

Pack of 12 Replacement Wicks 13/086/0

Replacement Pot 13/087/0



**Statement of
Conformity
Available**

Digital max/min thermometers to measure humidity and indoor and outdoor temperature. Probe thermometers can be supplied with Calibration Certificate traceable to National Standards if required. UKAS Calibration Certificate can be supplied for external probes. The instruments are supplied complete with battery and full operating instructions. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

1. Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures. Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for outdoor reading.



Temperature Range: -50 to +70°C&F
 Dimensions: 98 x 74 x 17mm
 LCD Dimensions: 35 x 52mm
12/412/3
Replacement Probe - 12/412/1

BEST SELLER

2. Jumbo Max/Min Thermometer & Hygrometer

Twin displays to read indoor temperature and humidity or indoor and outdoor temperatures. Complete with stand and 2m cable.



Temperature Range: -50 to +70°C&F
 Humidity Range: 20 to 99%RH
 Dimensions: 103 x 98 x 21mm
 LCD Dimensions: 60 x 80mm
12/421/3
Replacement Probe - 12/421/1

3. Weatherstation

Max/min thermometer with silvered front and black trim. Large display with simultaneous reading of temperature and humidity. Complete with stand or hook for wall hanging and 2m cable for outdoor probe.



Temperature Range: -20 to +70°C&F
 Humidity Range: 20 to 99%RH
 Dimensions: 98 x 74 x 17mm
 LCD Dimensions: 35 x 52mm
13/420/3
Replacement Probe - 13/420/3



4. Indoor/Outdoor Humidity & Temperature Meter

Instrument to measure indoor and outdoor humidity and temperature. Max/min recording. Main body includes magnet, clip and stand. 2 x 1m cables.



Temperature Range: -50 to +70°C&F
 Humidity Range: 10 to 95% RH
 Dimensions: 63 x 63 x 22mm
 LCD Dimensions: 22 x 40mm
22/425/3

Weatherstation Description	Range		Max/Min Function	Cable Length	LCD Dimensions	Product Dimensions	Product Number
	Internal Reading	Remote Reading					
1. Max/Min Indoor/Outdoor	0 to +50°C&F	-50 to +70°C&F	✓	2.5m	35 x 52mm	98 x 74 x 17mm	12/412/3
1. Replacement Probe	-	-	-	2.5m	-	-	13/412/1
2. Jumbo Max/Min Thermometer & Hygrometer	-10 to +50°C&F & 20 to 99%RH	-50 to +70°C&F	✓	2.0m	60 x 80mm	103 x 98 x 21mm	12/421/3
2. Replacement Probe	-	-	-	2.0m	-	-	12/421/1
4. Weatherstation	0 to +50°C&F & 20 to 99%RH	-20 to +70°C&F	✓	-	35 x 52mm	98 x 74 x 17mm	13/420/3
4. Replacement Probe	-	-	-	2.0m	-	-	13/420/4
5. Twin Reading Thermometer & Humidity Meter	-10 to +50°C&F & 10 to 95%RH	-50 to +70°C&F & 10 to 95%RH	✓	1.0m	22 x 40mm	63 x 63 x 22mm	22/425/3



Calibration Services

- UKAS Accredited Laboratory
- Certificate of Calibration



To complement the production facilities of **Brannan Thermometers**, a comprehensive calibration service is available for a variety of instruments such as electronic max/mins and weatherstations, fridge or freezer thermometers and wall thermometers. In addition, we are able to calibrate many other measuring instruments, including pressure gauges and hydrometers.

This service is available, for an additional charge, at time of product's purchase or for customers own existing instruments. Please contact our Sales Team to discuss the suitability of your instrument for calibration.



What is a Calibration & Why Calibrate

- A calibration is a procedure in which an instrument is tested to ensure it conforms with a recognised standard and is used to verify the accuracy of an instrument.
- By comparing an instrument of a known value against a second instrument (unit under test), the difference can be calculated and suitable corrections determined.
- Calibration points can be drawn on a graph and joined together to form a calibration curve. This allows the user to estimate the corrections at points where a calibration value has not been measured.

Re-Calibration Service

We offer a re-calibration service for customers' own instruments. The calibration frequency for a specific thermometer is up to the individual customer however it should be based on factors such as:

- The environment in which the instrument is used,
- The frequency of use and
- The level of confidence required in the readings taken from the customers' process.


To complement our calibration services, we are able to supply packaging for use when sending your instrument to us to help reduce the risk of breakage during transit.

UKAS Accredited Laboratory



0582

- Our facilities conform to (BS) EN ISO/IEC 17025: 2017 – 'General requirements for the competence of testing and calibration laboratories'.
- Certification is available for test temperatures between -60°C and +250°C.
- Certificates are produced with reference to the International Temperature Scale of 1990 (ITS-90).

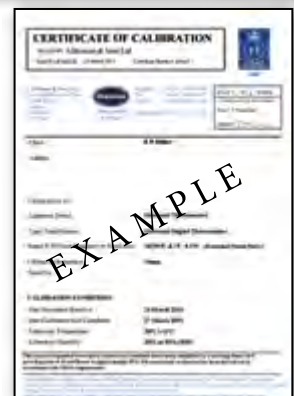


Example of UKAS Calibration Certificate

Additional Calibration Services

In addition to our UKAS Accredited Calibration Laboratory, we have the capability of providing calibration certificates traceable to National Standards for many other instruments.

Example of Calibration Certificate traceable to National Standards

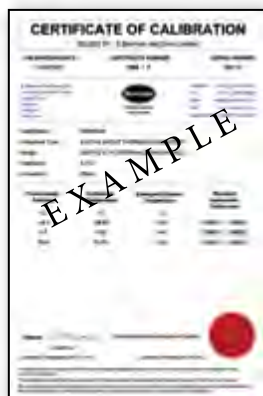

Statement of Conformity available on request



All of our prices are competitive and quantity discounts apply. Please contact us for further details on the above, the most suitable calibration for your instrument or to discuss other instruments suitable for Certification.

The following certificates and documentation are current at time of print. For most up to date certificates, please see our website.

Brannan Conflict Minerals Policy

Tel: +44 (0) 1948 818600 • Fax: +44 (0) 1948 818625 • Email: sales@brannan.co.uk • Web: www.brannan.co.uk

In August 2012 the US Securities and Exchange Commission (SEC) approved a conflict minerals rule as mandated by the Dodd-Frank Wall Street Reform and Consumer Protection Act. This rule imposes new supply chain reporting requirements on publicly traded companies to provide transparency and consumer awareness regarding the use of "conflict minerals" (specifically the metals tantalum, tin, tungsten and gold) in their products.

The new reporting requirements are based on concerns that revenues obtained from mining and transport of conflict minerals finance the ongoing conflict in the Democratic Republic of Congo (DRC) and surrounding countries and the resulting humanitarian crises.

Although reporting requirements only apply to publicly traded companies required to report to the SEC, these requirements are expected to affect the entire electronics industry supply chain. Any company supplying products to an affected company is expected to be asked for conflict minerals information.

S.Brannan & Sons Limited has a proud reputation for delivering quality products and is committed to sourcing only from reputable suppliers. We can confirm that we have received confirmation from all our suppliers that their products adhere to this new ruling.

This policy is available for customers and members of the public on request or via our website www.brannan.co.uk.



Signed: _____ Date: 18 January 2017

Andrew Brannan
Joint Managing Director

S.Brannan & Sons Ltd
Leomanor Industrial Estate, Chester, Merseyside, CH3 7JF, UK

Brannan Environmental Policy

Tel: +44 (0) 1948 818600 • Email: sales@brannan.co.uk • Web: www.brannan.co.uk

S. Brannan & Sons are committed to the implementation and maintenance of an effective Environmental Management System that meets the requirements of BS EN ISO 14001.


The company recognises that its activities, products, and services have an environmental impact at all stages of the product life cycle and are committed to making continual reductions in this impact.

It is our policy to:

- Prevent pollution in the form of waste, emissions, and noise.
- Protect the Environment in all aspects of our business and in particular significant aspects of our operations, to prevent negative environmental effects.
- Ensure efficient use of electricity and gas in production, lighting and heating by adopting & using more energy efficient processes and equipment.
- Work with customers, suppliers, and employees to raise awareness of environmental issues and to stress the importance of reducing our environmental impact.
- Minimise the amount of waste to landfill by adoption of the waste hierarchy; ELIMINATE, REDUCE, REUSE, RECYCLE & by focusing on eliminating single use plastic from our operations.

The company will comply with all relevant legislation and customer standards and conduct a regular review of its environmental impact with the aim of continuous improvement in all aspects of its operations.

This policy is available for customers and members of the public on request or via our website www.brannan.co.uk.



Signed: _____ Date: 1st April 2020

Andrew Brannan
Managing Director

S.Brannan & Sons Ltd
Leomanor Industrial Estate, Chester, Merseyside, CH3 7JF, UK

Brannan Quality Policy

Tel: +44 (0) 1948 818600 • Email: sales@brannan.co.uk • Web: www.brannan.co.uk

S. Brannan & Sons are committed to the implementation and maintenance of an effective Quality Management system that meets the requirements of BS EN 9001. The Company has a proud reputation for delivering quality products and is totally committed to understanding and meeting the needs and expectations of all our customers.

In order to achieve this objective, S.Brannan & Sons Limited will:

- actively promote the philosophy that quality is the responsibility of every employee and that customer satisfaction is paramount.
- conduct our business in a professional and ethical manner.
- deliver products and services on time and at the agreed price.
- ensure the quality of products and services through structured staff training and development.
- make informed business decisions based on data gathered from our processes.

The Company will comply with all relevant legislation and customer standards and conduct a regular review of its quality management system with the aim of continuous improvement in all aspects of its operations.

This policy is available for customers and members of the public on request or via our website www.brannan.co.uk.



Signed: _____ Date: 1st April 2020

Andrew Brannan
Managing Director

S.Brannan & Sons Ltd
Leomanor Industrial Estate, Chester, Merseyside, CH3 7JF, UK

Brannan Ethical Policy

Tel: +44 (0) 1948 818600 • Fax: +44 (0) 1948 818625 • Email: sales@brannan.co.uk • Web: www.brannan.co.uk

- 1. Scope**
This Ethical Policy covers all activities of all S.Brannan & Sons Ltd business activities and should be followed by all Brannan employees.
- 2. Working within the Law**
Brannan will conform to all applicable laws and regulations in force in the country of operation and will not give orders or contracts that break such laws and regulations.
- 3. Treating People Fairly**
Brannan is committed to:
Treating employees, customers and business partners with respect and dignity.
Providing safe working conditions.
Ensuring no use of child labour, forced labour or prison labour.
Brannan will not work with partners who do not uphold such commitments.
Brannan has a specific Dignity at Work Policy.
Report any illegal or unethical behaviour - Any observed potentially illegal or unethical activity should be reported to a member of the Brannan management team immediately. Any substantiated reports of such behaviour will be treated in good faith and will not result in retaliatory action against the informer.
- 4. Acting with integrity**
Brannan is committed to acting with integrity and in good faith in all times.
Avoid giving or receiving improper gifts - Brannan does not permit or receive the gift or receipt of any other than token gifts. Brannan has a specific Anti-Bribery Policy.
Market, sell and negotiate in good faith - Brannan does not permit or condone the use of misleading or dishonest marketing, selling or negotiating techniques.
Maintain confidentiality - Brannan's production methods, business methods, dealings with customers, sources of supply and other proprietary information are among our most valuable assets. Brannan is committed to safeguarding such proprietary assets and providing confidentiality to its customers.
- 5. Ensuring Financial Probity**
Brannan will ensure that its financial reporting accurately reflects the business transactions conducted and conforms with the applicable laws and regulations.
- 6. Ethical Review**
This policy will be regularly reviewed for suitability and efficacy.



Signed: _____ Date: 18 January 2017

Andrew Brannan
Joint Managing Director

S.Brannan & Sons Ltd
Leomanor Industrial Estate, Chester, Merseyside, CH3 7JF, UK

Anti-Bribery Policy

Tel: +44 (0) 1244 811000 | Fax: +44 (0) 1244 811007 | Email: sales@brannan.co.uk | www.brannan.co.uk

Definition of Bribery:
 Bribery is committed when an inducement or reward is provided, in order to gain any commercial, technical, regulatory or economic advantage for S. Brannan & Sons Ltd or another party.

Company Policy on bribery
 S.Brannan & Sons Ltd maintains the utmost integrity, the provision of the acceptance of any bribe, reward such as other inducement or other key person or position, wherever they are situated and whether they are a public official or body or private person or company or any individual employee, agent or other person or body acting on the Company's behalf is never to gain any commercial, contractual or regulatory advantage for the Group in a way which is prohibited or in order to gain any personal advantage, pecuniary or otherwise, for the individual or persons connected with the individual.

This offence of bribery will be treated most seriously and constitutes gross misconduct in the company rules.

Company Policy with relation to receiving gifts:
 S. Brannan & Sons Ltd does not prohibit the receiving of appreciation gifts or hospitality and welcomes that to receive a gift in certain circumstances and/or courtesies would cause offence to our trading partners. An acceptable gift is one that would be judged by a reasonable observer to be suitable. Repeated and regular offers of gifts should be declined. A gift should not be accepted for something in return.

Company Policy with relation to offering gifts:
 S. Brannan & Sons Ltd accepts the giving of promotional items or gifts on a festival or at another special time, up to and not exceeding the value of £50.

Raising concerns and asking for guidance
 Decisions as to what is and what is not acceptable may be difficult. If any employee is in doubt as to whether it potential act constitutes bribery, the matter should be referred to a Director of the Company.

Employees are encouraged to make concerns about, or suspicions of, wrongdoing at the earliest possible stage and no employee will suffer any detriment as a result of raising genuine concerns about bribery, even if they turn out to be mistaken.

 Andrew Brannan
 Joint Managing Director

Download This Document & Its Documentation
 www.brannan.co.uk | Tel: +44 (0) 1244 811000 | Fax: +44 (0) 1244 811007 | Email: sales@brannan.co.uk | www.brannan.co.uk

Health & Safety Policy

Tel: +44 (0) 1244 811000 | Fax: +44 (0) 1244 811007 | Email: sales@brannan.co.uk | www.brannan.co.uk

S. Brannan & Sons Limited understands that our employees are our most valuable resource and that their health, safety and welfare is of paramount importance.

We recognise that good health and safety practices are an integral part of our business performance and consider them to be a key management objective.

In order to achieve this objective S. Brannan & Sons Limited will:

- consult with employees on matters affecting their health and safety,
- provide employees with suitable and sufficient information, training and supervision,
- ensure adequate control of the health and safety risks arising from the company's work activities,
- provide and maintain safe plant and equipment,
- ensure safe handling and use of substances,
- actively aim to reduce accidents and cases of work related ill health,
- maintain safe and healthy working conditions.

All employees are required to take reasonable care for their own health and safety and of others who may be affected by their actions or omissions, and cooperate with S. Brannan & Sons Limited to ensure compliance with all legislative requirements and standards.

The Company will conduct a regular review of its health and safety performance with the aim of continuous improvement in all aspects of its operations.

This policy is available for customers and members of the public on request of via our website www.brannan.co.uk.

 Managing Director

17th February 2020
 Date

Download This Document & Its Documentation
 www.brannan.co.uk | Tel: +44 (0) 1244 811000 | Fax: +44 (0) 1244 811007 | Email: sales@brannan.co.uk | www.brannan.co.uk

Mission Statement

Tel: +44 (0) 1244 811000 | Fax: +44 (0) 1244 811007 | Email: sales@brannan.co.uk | www.brannan.co.uk

Brannan is dedicated to providing high quality measurement instruments backed by exceptional customer service. The success and growth of our business is built on consistently exceeding customer expectations through, innovation, continuous improvement and our passion for what we do

Download This Document & Its Documentation
 www.brannan.co.uk | Tel: +44 (0) 1244 811000 | Fax: +44 (0) 1244 811007 | Email: sales@brannan.co.uk | www.brannan.co.uk



**Also available:
Brannan Scientific Catalogue
Brannan Industrial Catalogue**



[facebook.com/brannanthermometersandinstrumentation](https://www.facebook.com/brannanthermometersandinstrumentation)



plus.google.com/114245952167321950392/posts



twitter.com/Brannan_UK

S. Brannan & Sons Ltd.

Cleator Moor, Cumbria CA25 5QE, UK

Tel: +44 (0)1946 816600

Fax: +44 (0)1946 816625

Web: www.brannan.co.uk

Email: sales@brannan.co.uk