

0501 • 3/8"-1/2"

0502 • 3/8"-3/4"

AUTOMATIC AIR VENTS "VALMAT" WITH O-RING YELLOW AND NICKEL-PLATED

CONNECTIONS: MALE WITH O-RING
MALE WITHOUT O-RING

0501



0502

HYDRAULIC FEATURES

The automatic air vent "Valmat" has a single automatic float and carries out two main functions: the evacuation of a consistent air flow through a pipeline (e.g., during loading/pressurization of the plant) and degassing, which discharges air trapped or formed in the pipeline, while functioning. This valve has a paramount importance in climatization networks and systems, evacuating and discharging trapped air in water pipes for services under pressure. Moreover, as thoroughly documented in European Standard EN 14868, the presence of oxygen in heating systems can provoke anodic corrosion, noise, air pockets, obstructions, etc., that may significantly compromise the performance and integrity of the systems. Further, its reduced space requirements make this valve ideal for use inside modern heat generators, where air must be evacuated from the circulation pumps in order to prevent unwanted cavitation phenomena.

TECHNICAL FEATURES

| | |
|---|--|
| Pressure: | |
| Maximum allowable working pressure (PN) | 10 bar |
| minimum sealing pressure | 0.2 bar (Grade A according to EN 12266-1) |
| range of operation air evacuation | from 0.5 bar to 7 bar (tolerance \pm 10% max. detected) |
| Temperature: | |
| maximum working temperature (TS) | 0°C (excluding ice) +110°C |
| Compatible fluids : | |
| Heat transfer fluids in compliance with Italian national standards (UNI 8065 § 6) | |
| Glycolate solutions (glycol) | 50% |
| Threading: | |
| Pipeline connection | Threads according to ISO 228/1 |
| Requirements and tests as per | EN 1074-4 (together with additional requisites under FL.GQ.11) |

DESIGN

Die cast brass body EN 1982-CB754S
 Brass plug EN 12165 - CW617N
 Seat in brass EN 12164 - CW614N
 Internal mechanisms in ACETAL RESIN (POM)
 Seat gaskets and o-ring in NBR RUBBER
 Float in highly resistant POLYPROPYLENE PP
 STAINLESS STEEL spring EN 10088-14310 (AISI 302)
 Nickel plating ELECTRODEPOSITED COATING EN 12540 (Cu/Ni5s)

PRODUCT CODES

| | |
|--|----------------------------------|
| 0501.012 male 3/8" with o-ring yellow | 0502.012 male 3/8" yellow |
| 0501.015 male 1/2" with o-ring yellow | 0502.013 male 3/8" nickel plated |
| 0501.112 male 3/8" with o-ring nickel plated | 0502.015 male 1/2" yellow |
| 0501.115 male 1/2" with o-ring nickel plated | 0502.016 male 1/2" nickel plated |
| | 0502.020 male 3/4" yellow |





OFFICINE RIGAMONTI S.p.A.
 via Circonvallazione, 9
 13018 Valduggia (VC), ITALY
 TEL +39 0163.48165
 FAX +39 0163.47254
 www.officinerigamonti.it
 export@officinerigamonti.it

0501 • 3/8"-1/2"

0502 • 3/8"-3/4"

AUTOMATIC AIR VENTS "VALMAT" WITH O-RING YELLOW AND NICKEL-PLATED

CONNECTIONS: MALE WITH O-RING
MALE WITHOUT O-RING

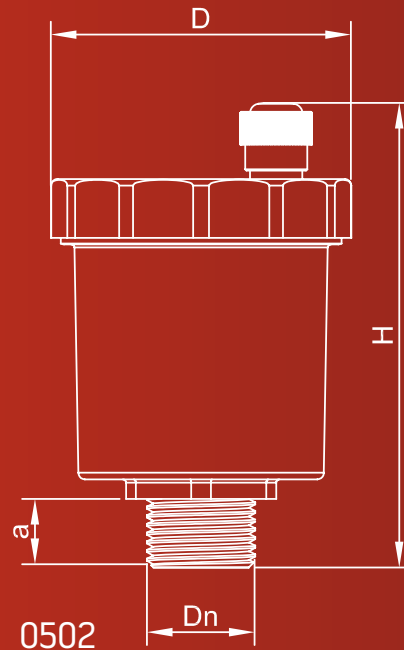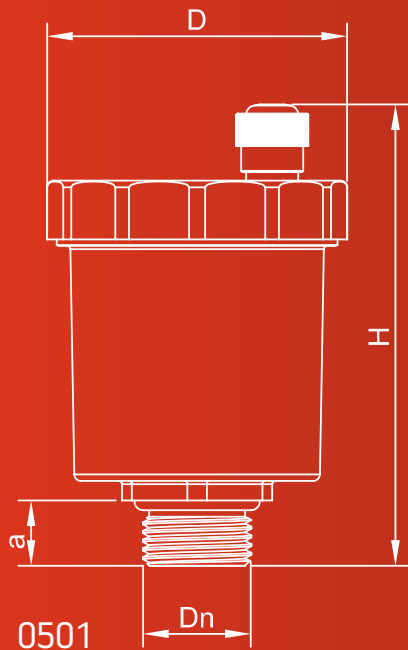

FEATURES

| Cod. | Dimensions | | | |
|------|------------|-----|----|-----|
| | Dn | D | H | a |
| 0501 | 3/8" | Ø46 | 70 | 7,5 |
| 0501 | 1/2" | Ø46 | 70 | 8 |
| 0502 | 3/8" | Ø46 | 70 | 9 |
| 0502 | 1/2" | Ø46 | 70 | 9 |
| 0502 | 3/4" | Ø46 | 70 | 8,5 |

OPERATIONAL CURVE AIR VENTS

