


Kaiflex[®] ST Selfseal

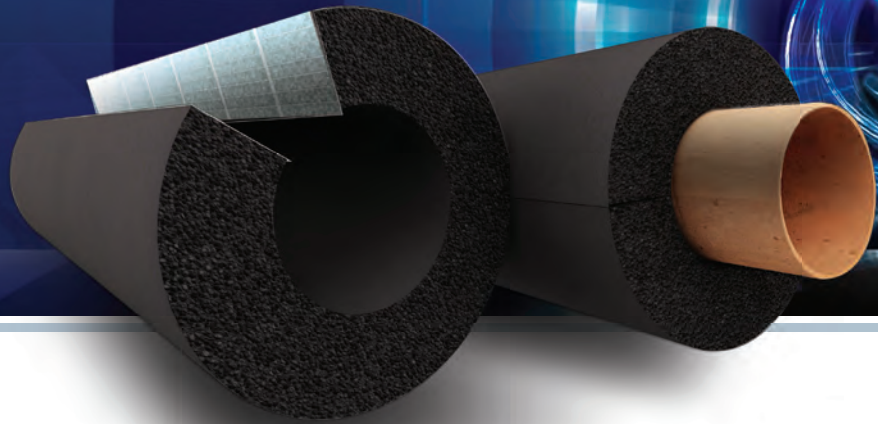

Designed for quick and easy installation

Insulation with self-adhesive strips pre-applied, Kaiflex ST Selfseal is able to combine outstanding technical values with a streamlined application process that is as easy as peeling a self-adhesive release tape.

Kaiflex ST Selfseal can be installed in a fraction of the time whilst still maintaining the same energy saving performance and inherent resistance to microbial growth as standard Kaiflex ST. With a greatly simplified application procedure Kaiflex ST Selfseal can be installed even in extremely tight areas.

Self-adhesive pipe insulation coiled for the fastest possible application speeds, **Kaiflex ST Selfseal** retain the same energy saving performance as all standard Kaiflex ST insulation.

- Fast application
- Self-adhesive strips minimise the need for adhesive
- Closed cell structure with in-built water vapour barrier
- Inherent moisture resistance with long lasting protection against corrosion
- In-built anti-microbial resistance

Kaiflex ST Selfseal tubes

Colour: black; Length: 2 m; tube with self-adhesive strips

Copper Pipe Cu			Iron & Steel pipe Fe			9 mm Insulation Thickness			13 mm Insulation Thickness		
NB inch	Nom OD inch	Nom OD mm	NB inch	Nom OD mm	Min ID mm	Reference	m / carton		Reference	m / carton	
1/2	5/8	15			16.0	ST-09x015-A	240		ST-13x015-A	154	
5/8	3/4				21.0	ST-09x020-A	160		ST-13x020-A	120	
3/4	7/8	22	1/2	21.3	23.0	ST-09x022-A	156		ST-13x022-A	110	
1	1 1/8	28	3/4	26.9	29.0	ST-09x028-A	124		ST-13x028-A	86	
1 1/4	1 3/8	35	1	33.7	36.0	ST-09x035-A	92		ST-13x035-A	76	
1 1/2	1 5/8	42	1 1/4	42.4	43.5	ST-09x042-A	70		ST-13x042-A	56	
			1 1/2	48.3	49.5	ST-09x048-A	60		ST-13x048-A	48	
2	2 1/8	54			55.0	ST-09x054-A	60		ST-13x054-A	46	
			2	60.3	61.5	ST-09x060-A	60		ST-13x060-A	40	
2 1/2	2 5/8	67			68.5						
2 13/16	3	76.1	2 1/2	76.1	77.0				ST-13x076-A	34	
3	3 1/8	80			81.0						
			3	88.9	90.5				ST-13x089-A	30	

Copper Pipe Cu			Iron & Steel pipe Fe			19 mm Insulation Thickness			25 mm Insulation Thickness		
NB inch	Nom OD inch	Nom OD mm	NB inch	Nom OD mm	Min ID mm	Reference	m / carton		Reference	m / carton	
1/2	5/8	15			16.0	ST-19x015-A	86		ST-25x015-A ◊	60	
5/8	3/4				21.0	ST-19x020-A	76		ST-25x020-A ◊	50	
3/4	7/8	22	1/2	21.3	23.0	ST-19x022-A	74		ST-25x022-A ◊	42	
1	1 1/8	28	3/4	26.9	29.0	ST-19x028-A	58		ST-25x028-A ◊	40	
1 1/4	1 3/8	35	1	33.7	36.0	ST-19x035-A	48		ST-25x035-A ◊	32	
1 1/2	1 5/8	42	1 1/4	42.4	43.5	ST-19x042-A	40		ST-25x042-A ◊	24	
			1 1/2	48.3	49.5	ST-19x048-A	30		ST-25x048-A ◊	24	
2	2 1/8	54			55.0	ST-19x054-A	30		ST-25x054-A ◊	22	
			2	60.3	61.5	ST-19x060-A	28		ST-25x060-A ◊	22	
2 1/2	2 5/8	67			68.5						
2 13/16	3	76.1	2 1/2	76.1	77.0	ST-19x076-A	28		ST-25x076-A ◊	18	
3	3 1/8	80			81.0						
			3	88.9	90.5	ST-19x089-A	22		ST-25x089-A ◊	14	

- Items marked with ◊ delivery quoted on request.



KAIMANN
foam technology of tomorrow

Kaimann GmbH • School House Business Centre • Brideoak Street, Waterhead • Oldham • Greater Manchester • OL4 2HB • Phone +44 (0) 161 627 3289
Fax +44 (0) 161 880 2551 • Email info.uk@kaimann.com • www.kaimann.co.uk • © 2012 Kaimann GmbH • All rights reserved • 199-BRO-1211-UKIRL

Kaimann GmbH provides this information as a technical service. Where information is provided that is a direct result of Kaimann's own technical analysis and testing, the information displayed is an interpretation of the data accurate to the extent of our knowledge and ability as of date of printing. Standardised methods and procedures are used wherever possible. Some information presented may be derived from sources other than Kaimann and in these cases Kaimann is substantially, if not wholly, relying upon the other source(s) to provide accurate information.

Actual technical performance may be dependent on the specific installation and site conditions. Since Kaimann cannot control installation or site conditions, Kaimann does not guarantee that the user will obtain the same results as published in this document. It is the responsibility of each user to perform their own tests in order to determine the safety, fitness and suitability of the products, or combination of products, for any foreseeable purposes, applications and uses by the user and/or any third party to which the user may convey the products.

Declared technical performance, laws and recommendations may vary by country and all data presented here is intended for use in the UK & Ireland only. All data and information presented is provided as a technical service and are subject to change without notice.